



suttontools

ISO TAPS

- M, MF ▪ UNC, UNF, UNEF, UN, UNS ▪ BSW, BSF, BA, BSB
- Rc (BSPT), Rp (BSPPL), Pg Series, G (BSPF) ▪ NPT, NPTF, NPSF



Special Taps Express Delivery Service...

Sutton Tools is a leading international Manufacturer of specialist cutting tools and is renowned for producing high performance, precision cutting tools specifically designed to individual customer requirements.

With comprehensive customer service and warehouse facilities, our Express Delivery Service enables us to meet your requirements more efficiently than ever before.

All Thread Forms

UN, Metric, UNJC, UNJF, MJ, UH, Pg, Whit, Rope forms & Acme and more!!

With our state of the art CNC grinding equipment almost any profile can be achieved. Feel free to discuss these with our Tech team.

Within 24 hours*

- Straight Flute Taps M3 to M127
- Spiral Taps M3 to M36

Within 48 Hours*

- Gun Taps M3 to M36

Within 5 Working Days*

Surface Finishes and Treatments:


- Steam Oxide
- Gas Nitride
- Titanium Nitride
- Chromium Nitride
- Titanium Carbo-Nitride
- Titanium Aluminum Nitride

Page M	68	70	71	72						73	73	74	75	75	76	77	77
MF	78	80								81	81	82	83		83		
UNC	84	86	87		94					89	89	90	91	91	92	93	93
UNF	95	97	98							102	102	103	104		104	105	
BSW	108	110	111		117					112	112	113	114	114	115	116	116
BSF, BA, BSB (Brass)	118																
G (BSPF)	120	122								120			121				
Rc (BSPT), Rp (BSPPL), Pg, NPT, NPTF, NPSF	123					123	123	124									

ISO	VDI	Material Group	Sutton
P	A	Steel	N
M	R	Stainless Steel	VA
K	F	Cast Iron	GG
N	N	Non-Ferrous Metals, Aluminiums & Coppers	Al W
S	S	Titaniums & Super Alloys	Ti Ni
H	H	Hard Materials (≥ 45 HRC)	H

^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

For expert tooling recommendations, go to: www.suttontools.com/expert-tool-selector

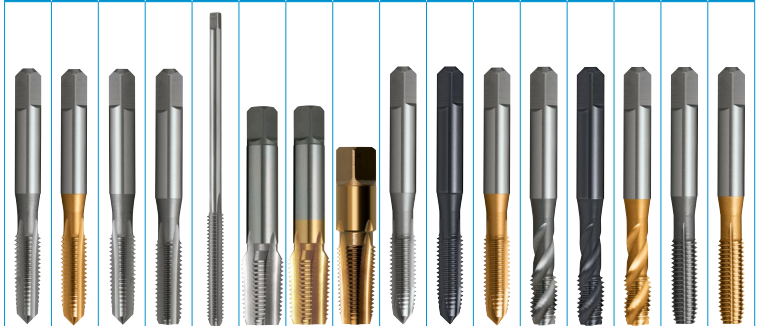

Material Surface Finish Sutton Designation Tapping Depth

HSS		HSS		HSS		HSS		HSS		HSSE			HSSE			HSSE		
Br	TiN	Br	TiN	Br	TiN	Br	TiN	Br	TiN	Br	Blu	TiN	Br	Blu	TiN	Br	TiN	
N		N-LH O/Size		Nut		N		N		N			N			N		
≤ 1xØ		≤ 1xØ		≤ 2xØ		-		-		≤ 3xØ			≤ 2.5xØ			≤ 1.5xØ		


ISO	VDI ³³²³	Material	Condition	HB	N/mm ²	●	●	●	●	●	●	●	●	●	●	●	●	●		
P	1	Steel - Non-alloy, cast & free cutting	~ 0.15 %C	A	125	440	●	●	●	●	●	●	●	●	●	●	●	●		
	2			A	190	640	●	●	●	●	●	●	●	●	●	●	●	●	●	
	3		QT	250	840	●	●	●	●	●	●	○	●	●	○	●	●	○	○	
	4		~ 0.75 %C	A	270	910	●	●	●	●	●	●	○	●	○	●	●	○	○	
	5			QT	300	1010		○			○			○			○			
	6	Steel - Low alloy & cast < 5% of alloying elements	A	180	610	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	7		QT	275	930	○	●	○	○	○	○	○	○	○	○	○	○	○	○	
	8		QT	300	1010		○			○			○			○				
	9		QT	350	1180								○							
	10	Steel - High alloy, cast & tool	A	200	680					○			○			○				
	11		HT	325	1100															
12	Steel - Corrosion resistant & cast	Ferritic / Martensitic	A	200	680						○	○		○	○					
13			QT	240	810							○	○		○	○				
M	14.1	Stainless Steel	Austenitic	AH	180	610			○		○	○	○	○	○	○	○	○		
	14.2			Duplex	250	840						○	○	○	○	○	○	○	○	
	14.3			Precipitation Hardening	250	840														
K	15	Cast Iron - Grey (GG)	Ferritic / Pearlitic		180	610	○	○	○	○	○	○	○							
	16			Pearlitic	260	880														
	17	Cast Iron - Nodular (GGG)	Ferritic		160	570	○	○	○	○	○	○	○	○	○	○	○	○		
	18			Pearlitic	250	840							○	○	○	○	○	○	○	
	19			Cast Iron - Malleable	Ferritic		130	460	○	○	○	○	○	○	○	○	○			
20	Pearlitic	230	780																	
N	21	Aluminum & Magnesium - wrought alloy	Non Heat Treatable		60	210	○	○	○	○	○	○	○	○	○	○	○	○		
	22			Heat Treatable	AH	100	360	○	○	○	○	○	○	○	○	○	○	○	○	
	23	Aluminum & Magnesium - cast alloy ≤12% Si	Non Heat Treatable		75	270	○	○	○	○	○	○	○	○	○	○	○	○		
	24			Heat Treatable	AH	90	320	○	○	○	○	○	○	○	○	○	○	○	○	
	25			Al & Mg - cast alloy >12% Si	Non Heat Treatable		130	460							○		○			
	26	Copper & Cu alloys (Brass/Bronze)	Free cutting, Pb > 1%		110	390	○	○	○	○	○	○	○	○	●	○	●	○	●	
	27			Brass (CuZn, CuSnZn)	90	320							○	○	○	○	○	○	○	
	28			Bronze (CuSn)	100	360	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	29	Non-metallic - Thermosetting & fiber-reinforced plastics																		
30	Non-metallic - Hard rubber, wood etc.																			
S	31	High temp. alloys	Fe based	A	200	680														
	32			AH	280	950														
	33		Ni / Co based	A	250	840														
	34			AH	350	1180														
	35			C	320	1080														
	36	Titanium & Ti alloys	CP Titanium		400	MPa														
	37.1			Alpha alloys	860	MPa														
37.2	Alpha / Beta alloys			A	960	MPa														
37.3				AH	1170	MPa														
37.4	Beta alloys			A	830	MPa														
37.5		AH	1400	MPa																
H	38.1	Hardened steel		HT	45	HRC														
	38.2			HT	55	HRC														
	39.1			HT	58	HRC														
	39.2			HT	62	HRC														
	40			Cast Iron	Chilled	C	400	1350						○	○	○	○	○	○	○
	41	HT	55			HRC														

Condition: A (Annealed), AH (Age Hardened), C (Cast), HT (Hardened & Tempered), QT (Quenched & Tempered)

ISO Taps Metric, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T384	T385
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Taper ISO 2 / 6H	Intermediate ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M2	x 0.4	41	8	-	2.50	2.00	4	3	1.6	T384 0200	T385 0200
0250	M2.5	x 0.45	45	10	-	2.80	2.24	5	3	2.05	T384 0250	T385 0250
0300	M3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T384 0300	T385 0300
0350	M3.5	x 0.6	50	13	17.5	3.55	2.80	5	3	2.9	T384 0350	T385 0350
0400	M4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T384 0400	T385 0400
0450	M4.5	x 0.75	53	13	19	4.50	3.55	6	3	3.7	T384 0450	T385 0450
0500	M5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T384 0500	T385 0500
0600	M6	x 1	66	19	26	6.30	5.00	8	3	5.0	T384 0600	T385 0600
0700	M7	x 1	66	19	26	7.10	5.60	8	4	6.0	T384 0700	T385 0700
0800	M8	x 1.25	72	22	30	8.00	6.30	9	4	6.8	T384 0800	T385 0800
0900	M9	x 1.25	72	22	31	9.00	7.10	10	4	7.8	T384 0900	T385 0900
1000	M10	x 1.5	80	24	34	10.00	8.00	11	4	8.5	T384 1000	T385 1000
1100	M11	x 1.5	85	25	-	8.00	6.30	9	4	9.5	T384 1100	T385 1100
1200	M12	x 1.75	89	29	-	9.00	7.10	10	4	10.2	T384 1200	T385 1200
1400	M14	x 2	95	30	-	11.20	9.00	12	4	12.0	T384 1400	T385 1400
1600	M16	x 2	102	32	-	12.50	10.00	13	4	14.0	T384 1600	T385 1600
1800	M18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T384 1800	T385 1800
2000	M20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T384 2000	T385 2000
2200	M22	x 2.5	118	38	-	16.00	12.50	16	4	19.5	T384 2200	T385 2200
2400	M24	x 3	130	45	-	18.00	14.00	18	4	21.0	T384 2400	T385 2400
2700	M27	x 3	135	45	-	20.00	16.00	20	4	24.0	T384 2700	T385 2700
3000	M30	x 3.5	138	48	-	20.00	16.00	20	4	26.5	T384 3000	T385 3000
3300	M33	x 3.5	151	51	-	22.40	18.00	22	4	29.5	T384 3300	T385 3300
3600	M36	x 4	162	57	-	25.00	20.00	24	4	32.0	T384 3600	T385 3600
3900	M39	x 4	170	60	-	28.00	22.40	26	4	35.0	T384 3900	T385 3900
4200	M42	x 4.5	170	60	-	28.00	22.40	26	4	37.5	T384 4200	T385 4200
4500	M45	x 4.5	187	67	-	31.50	25.00	28	4	40.5	T384 4500	T385 4500
4800	M48	x 5	187	67	-	31.50	25.00	28	4	43.0	T384 4800	T385 4800
5200	M52	x 5	200	70	-	35.50	28.00	31	4	47.0	T384 5200	T385 5200

Tap & Drill Sets

0014

14 piece set (intermediate)

Taps: M3, M4, M5, M6, M8, M10, M12
Drills: 2.5, 3.3, 4.2, 5.0, 6.8, 8.5, 10.2mm

T385 0014



T385 0014

ISO	P													M			K				N							S										H																	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41						
T384	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T385	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

ISO Taps Metric, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. $1 \times d_1$

ISO 529



Catalogue Code	T386	T901
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	Bottoming	Set
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M2	x 0.4	41	8	-	2.50	2.00	4	3	1.6	T386 0200	T901 0200
0250	M2.5	x 0.45	45	10	-	2.80	2.24	5	3	2.05	T386 0250	T901 0250
0300	M3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T386 0300	T901 0300
0350	M3.5	x 0.6	50	13	17.5	3.55	2.80	5	3	2.9	T386 0350	T901 0350
0400	M4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T386 0400	T901 0400
0450	M4.5	x 0.75	53	13	19	4.50	3.55	6	3	3.7	T386 0450	T901 0450
0500	M5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T386 0500	T901 0500
0600	M6	x 1	66	19	26	6.30	5.00	8	3	5.0	T386 0600	T901 0600
0700	M7	x 1	66	19	26	7.10	5.60	8	4	6.0	T386 0700	T901 0700
0800	M8	x 1.25	72	22	30	8.00	6.30	9	4	6.8	T386 0800	T901 0800
0900	M9	x 1.25	72	22	31	9.00	7.10	10	4	7.8	T386 0900	T901 0900
1000	M10	x 1.5	80	24	34	10.00	8.00	11	4	8.5	T386 1000	T901 1000
1100	M11	x 1.5	85	25	-	8.00	6.30	9	4	9.5	T386 1100	T901 1100
1200	M12	x 1.75	89	29	-	9.00	7.10	10	4	10.2	T386 1200	T901 1200
1400	M14	x 2	95	30	-	11.20	9.00	12	4	12.0	T386 1400	T901 1400
1600	M16	x 2	102	32	-	12.50	10.00	13	4	14.0	T386 1600	T901 1600
1800	M18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T386 1800	T901 1800
2000	M20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T386 2000	T901 2000
2200	M22	x 2.5	118	38	-	16.00	12.50	16	4	19.5	T386 2200	T901 2200
2400	M24	x 3	130	45	-	18.00	14.00	18	4	21.0	T386 2400	T901 2400
2700	M27	x 3	135	45	-	20.00	16.00	20	4	24.0	T386 2700	•
3000	M30	x 3.5	138	48	-	20.00	16.00	20	4	26.5	T386 3000	•
3300	M33	x 3.5	151	51	-	22.40	18.00	22	4	29.5	T386 3300	•
3600	M36	x 4	162	57	-	25.00	20.00	24	4	32.0	T386 3600	•
3900	M39	x 4	170	60	-	28.00	22.40	26	4	35.0	T386 3900	•
4200	M42	x 4.5	170	60	-	28.00	22.40	26	4	37.5	T386 4200	•
4500	M45	x 4.5	187	67	-	31.50	25.00	28	4	40.5	T386 4500	•
4800	M48	x 5	187	67	-	31.50	25.00	28	4	43.0	T386 4800	•
5200	M52	x 5	200	70	-	35.50	28.00	31	4	47.0	T386 5200	•

Tap & Drill Sets

SDT1 28 piece set (taper, inter, bott) (Discount Group Z0304)
 Taps: M3, M4, M5, M6, M8, M10, M12
 Drills: 2.5, 3.3, 4.2, 5.0, 6.8, 8.5, 10.2mm

T901 SDT1



T901 SDT1

ISO	P													M					K					N								S												H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41													
T386	●	●	●	●	●	●	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○					
T901	○	○	○	○	○	○	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective



• Available on request as special manufacture. Subject to lead time.

M Finder

ISO Taps Metric, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

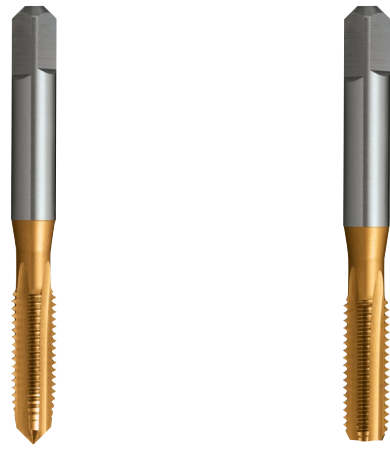

Catalogue Code	T387	T388
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TiN	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0200	M 2	x 0.4	41	8	-	2.50	2.00	4	3	1.6	T387 0200*	T388 0200*
0250	M 2.5	x 0.45	45	10	-	2.80	2.24	5	3	2.05	•	•
0300	M 3	x 0.5	48	11	-	3.15	2.50	5	3	2.5	T387 0300*	T388 0300*
0350	M 3.5	x 0.6	50	13	-	3.55	2.80	5	3	2.9	T387 0350*	
0400	M 4	x 0.7	53	13	-	4.00	3.15	6	3	3.3	T387 0400*	
0450	M 4.5	x 0.75	53	13	19	4.50	3.55	6	3	3.7	•	•
0500	M 5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T387 0500	T388 0500*
0600	M 6	x 1	66	19	26	6.30	5.00	8	3	5.0	T387 0600	
0700	M 7	x 1	66	19	26	7.10	5.60	8	4	6.0	•	
0800	M 8	x 1.25	72	22	30	8.00	6.30	9	4	6.8	T387 0800*	T388 0800*
0900	M 9	x 1.25	72	22	31	9.00	7.10	10	4	7.8	•	•
1000	M 10	x 1.5	80	24	34	10.00	8.00	11	4	8.5		T388 1000*
1100	M 11	x 1.5	85	25	-	8.00	6.30	9	4	9.5	•	•
1200	M 12	x 1.75	89	29	-	9.00	7.10	10	4	10.2	T387 1200*	
1600	M 16	x 2	102	32	-	12.50	10.00	13	4	14.0	T387 1600*	
2200	M 22	x 2.5	118	38	-	16.00	12.50	16	4	19.5	•	•
2400	M 24	x 3	130	45	-	18.00	14.00	18	4	21.0	•	•
2700	M 27	x 3	135	45	-	20.00	16.00	20	4	24.0	•	•
3000	M 30	x 3.5	138	48	-	20.00	16.00	20	4	26.5	•	•
3300	M 33	x 3.5	151	51	-	22.40	18.00	22	4	29.5	•	•
3600	M 36	x 4	162	57	-	25.00	20.00	24	4	32.0	•	•
3900	M 39	x 4	170	60	-	28.00	22.40	26	4	35.0	•	•
4200	M 42	x 4.5	170	60	-	28.00	22.40	26	4	37.5	•	•
4500	M 45	x 4.5	187	67	-	31.50	25.00	28	4	40.5	•	•
4800	M 48	x 5	187	67	-	31.50	25.00	28	4	43.0	•	•
5200	M 52	x 5	200	70	-	35.50	28.00	31	4	47.0	•	•

ISO	P								M					K					N					S					H																									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41					
T387	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
T388	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective



Finder M

*Not available once current stock is depleted. • Available on request as special manufacture. Subject to lead time.

ISO Taps Metric, Straight Flute, N, Left Hand



- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

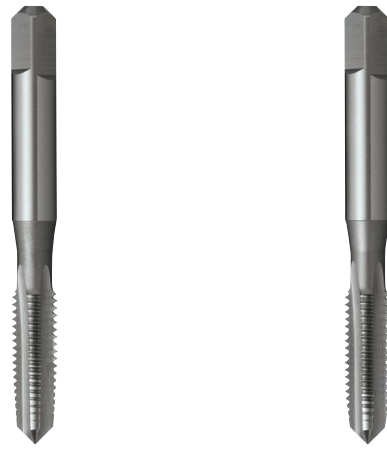

Catalogue Code	T389	T390
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	Left Hand	Left Hand
Chamfer	Taper	Intermediate
Limit & Nut Tolerance	ISO 2 / 6H LH	ISO 2 / 6H LH

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0300	M3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T389 0300	T390 0300
0400	M4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T389 0400	T390 0400
0500	M5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T389 0500	T390 0500
0600	M6	x 1	66	19	26	6.30	5.00	8	3	5.0	T389 0600	T390 0600
0800	M8	x 1.25	72	22	30	8.00	6.30	9	4	6.8	T389 0800	T390 0800
1000	M10	x 1.5	80	24	34	10.00	8.00	11	4	8.5	T389 1000	T390 1000
1200	M12	x 1.75	89	29	-	9.00	7.10	10	4	10.2	T389 1200	T390 1200
1400	M14	x 2	95	30	-	11.20	9.00	12	4	12.0	T389 1400	T390 1400
1600	M16	x 2	102	32	-	12.50	10.00	13	4	14.0	T389 1600	T390 1600
1800	M18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T389 1800	T390 1800
2000	M20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T389 2000	T390 2000



ISO	P												M				K				N				S								H																
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T389	●	●	●	●	●	●	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																
T390	●	●	●	●	●	○											○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																	


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

ISO Taps Metric, Straight Flute, N, Left Hand

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. $1 \times d_1$




Catalogue Code	T391
Discount Group	D0702
Material	HSS
Surface Finish	Brt
Sutton Designation	N
Geometry	Left Hand
Chamfer	Bottoming
Limit & Nut Tolerance	ISO 2 / 6H LH



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0300	M 3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T391 0300
0400	M 4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T391 0400
0500	M 5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T391 0500
0600	M 6	x 1	66	19	26	6.30	5.00	8	3	5.0	T391 0600
0800	M 8	x 1.25	72	22	30	8.00	6.30	9	4	6.8	T391 0800
1000	M 10	x 1.5	80	24	34	10.00	8.00	11	4	8.5	T391 1000
1200	M 12	x 1.75	89	29	-	9.00	7.10	10	4	10.2	T391 1200
1400	M 14	x 2	95	30	-	11.20	9.00	12	4	12.0	T391 1400
1600	M 16	x 2	102	32	-	12.50	10.00	13	4	14.0	T391 1600
1800	M 18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T391 1800
2000	M 20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T391 2000

ISO Taps Metric, Straight Flute, Oversize

- Oversize allowance to suit components for galvanize plating
- General purpose use, materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx $1 \times d_1$
- Taper and inter leads available on request



Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
1000	M10 +0.4	x 1.5	85	25	-	8.0	6.3	9.0	4	8.9	T392 1000
1200	M12 +0.4	x 1.75	89	29	-	9.0	7.1	10.0	4	10.6	T392 1200
1600	M16 +0.4	x 2	112	37	-	12.5	10.0	13.0	4	14.4	T392 1600
2000	M20 +0.4	x 2.5	118	38	-	16.0	12.5	16.0	4	17.9	T392 2000
2400	M24 +0.45	x 3	130	45	-	18.0	14.0	18.0	4	21.5	T392 2400

ISO	P				M			K			N			S					H																																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41							
T391	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
T392	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective

ISO Taps Metric, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

T393	T394
D0702	D0702
HSSE	HSSE
Brt	Blu
N	N
Intermediate	Intermediate
ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0250	M 2.5	x 0.45	45	10	-	2.80	2.24	5	3	2.05	T393 0250	T394 0250
0300	M 3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T393 0300	T394 0300
0350	M 3.5	x 0.6	50	13	17.5	3.55	2.80	5	3	2.9	T393 0350	T394 0350
0400	M 4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T393 0400	T394 0400
0500	M 5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T393 0500	T394 0500
0600	M 6	x 1	66	19	26	6.30	5.00	8	3	5.0	T393 0600	T394 0600
0800	M 8	x 1.25	72	22	30	8.00	6.30	9	3	6.8	T393 0800	T394 0800
1000	M 10	x 1.5	80	24	34	10.00	8.00	11	3	8.5	T393 1000	T394 1000
1200	M 12	x 1.75	89	29	-	9.00	7.10	10	3	10.2	T393 1200	T394 1200
1400	M 14	x 2	95	30	-	11.20	9.00	12	3	12.0	T393 1400	T394 1400
1600	M 16	x 2	102	32	-	12.50	10.00	13	3	14.0	T393 1600	T394 1600
1800	M 18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T393 1800	T394 1800
2000	M 20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T393 2000	T394 2000
2200	M 22*	x 2.5	118	38	-	16.00	12.50	16	4	19.5	•	T394 2200
2400	M 24*	x 3	130	45	-	18.00	14.00	18	4	21.0	•	T394 2400
3000	M 30*	x 3.5	138	48	-	20.00	16.00	20	4	26.5	•	T394 3000

M
Finder

ISO	P											M					K					N					S					H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T393	●	●	●	○	○	●	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T394	●	●	●	○	○	●	○						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

*HSS >20mm • Available on request as special manufacture. Subject to lead time.

ISO Taps Metric, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T395
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Intermediate
Limit & Nut Tolerance	ISO 2 / 6H

Finder M

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0250	M 2.5	x 0.45	45	10	-	2.80	2.24	5	3	2.05	•
0300	M 3	x 0.5	48	11	15	3.15	2.50	5	3	2.5	T395 0300
0350	M 3.5	x 0.6	50	13	17.5	3.55	2.80	5	3	2.9	T395 0350
0400	M 4	x 0.7	53	13	18	4.00	3.15	6	3	3.3	T395 0400
0500	M 5	x 0.8	58	16	22	5.00	4.00	7	3	4.2	T395 0500
0600	M 6	x 1	66	19	26	6.30	5.00	8	3	5.0	T395 0600
0800	M 8	x 1.25	72	22	30	8.00	6.30	9	3	6.8	T395 0800
1000	M 10	x 1.5	80	24	34	10.00	8.00	11	3	8.5	T395 1000
1200	M 12	x 1.75	89	29	-	9.00	7.10	10	3	10.2	T395 1200
1400	M 14	x 2	95	30	-	11.20	9.00	12	3	12.0	•
1600	M 16	x 2	102	32	-	12.50	10.00	13	3	14.0	T395 1600
1800	M 18	x 2.5	112	37	-	14.00	11.20	14	4	15.5	T395 1800
2000	M 20	x 2.5	112	37	-	14.00	11.20	14	4	17.5	T395 2000
2200	M 22*	x 2.5	118	38	-	16.00	12.50	16	4	19.5	•
2400	M 24*	x 3	130	45	-	18.00	14.00	18	4	21.0	•
3000	M 30*	x 3.5	138	48	-	20.00	16.00	20	4	26.5	•




ISO	P								M			K			N										S										H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T395	●	●	●	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps Metric, Spiral Flute, N


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T397	T396
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Bottoming ISO 2 / 6H	Bottoming ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill ∅	Item #	Item #
0250	M 2.5	x 0.45	45	5	-	2.80	2.24	5	2	2.05	T397 0250	•
0300	M 3	x 0.5	48	6	15	3.15	2.50	5	3	2.5	T397 0300	T396 0300
0350	M 3.5	x 0.6	50	6	17.5	3.55	2.80	5	3	2.9	T397 0350	T396 0350
0400	M 4	x 0.7	53	7	18	4.00	3.15	6	3	3.3	T397 0400	T396 0400
0500	M 5	x 0.8	58	8	22	5.00	4.00	7	3	4.2	T397 0500	T396 0500
0600	M 6	x 1	66	10	26	6.30	5.00	8	3	5.0	T397 0600	T396 0600
0800	M 8	x 1.25	72	13	30	8.00	6.30	9	3	6.8	T397 0800	T396 0800
1000	M 10	x 1.5	80	15	34	10.00	8.00	11	3	8.5	T397 1000	T396 1000
1200	M 12	x 1.75	89	18	-	9.00	7.10	10	3	10.2	T397 1200	T396 1200
1400	M 14	x 2	95	20	-	11.20	9.00	12	3	12.0	T397 1400	T396 1400
1600	M 16	x 2	102	20	-	12.50	10.00	13	3	14.0	T397 1600	T396 1600
1800	M 18	x 2.5	112	25	-	14.00	11.20	14	4	15.5	T397 1800	T396 1800
2000	M 20	x 2.5	112	25	-	14.00	11.20	14	4	17.5	T397 2000	T396 2000
2200	M 22*	x 2.5	118	38	-	16.00	12.50	16	4	19.5	T397 2200	T396 2200
2400	M 24*	x 3	130	45	-	18.00	14.00	18	4	21.0	T397 2400	T396 2400
3000	M 30*	x 3.5	138	48	-	20.00	16.00	20	4	26.5	T397 3000	T396 3000



ISO	P						M						K						N						S						H																												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41										
T397	●	●	●	○		●								○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																										○	
T396	●	●	●	○		●								○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																											○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective


*HSS >20mm • Available on request as special manufacture. Subject to lead time.



ISO Taps Metric, Spiral Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T398
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Bottoming
Limit & Nut Tolerance	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0250	M 2.5	x 0.45	45	5	-	2.80	2.24	5	2	2.05	•
0300	M 3	x 0.5	48	6	15	3.15	2.50	5	3	2.5	T398 0300
0350	M 3.5	x 0.6	50	6	17.5	3.55	2.80	5	3	2.9	•
0400	M 4	x 0.7	53	7	18	4.00	3.15	6	3	3.3	T398 0400
0500	M 5	x 0.8	58	8	22	5.00	4.00	7	3	4.2	T398 0500
0600	M 6	x 1	66	10	26	6.30	5.00	8	3	5.0	T398 0600
0800	M 8	x 1.25	72	13	30	8.00	6.30	9	3	6.8	T398 0800
1000	M 10	x 1.5	80	15	34	10.00	8.00	11	3	8.5	T398 1000
1200	M 12	x 1.75	89	18	-	9.00	7.10	10	3	10.2	T398 1200
1400	M 14	x 2	95	20	-	11.20	9.00	12	3	12.0	•
1600	M 16	x 2	102	20	-	12.50	10.00	13	3	14.0	T398 1600
1800	M 18	x 2.5	112	25	-	14.00	11.20	14	4	15.5	T398 1800
2000	M 20	x 2.5	112	25	-	14.00	11.20	14	4	17.5	T398 2000
2200	M 22*	x 2.5	118	38	-	16.00	12.50	16	4	19.5	•
2400	M 24*	x 3	130	45	-	18.00	14.00	18	4	21.0	•
3000	M 30*	x 3.5	138	48	-	20.00	16.00	20	4	26.5	•

M Finder



ISO	P								M		K				N						S						H																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T398	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

P Steel
 M Stainless Steel
 K Cast Iron
 N Non-Ferrous Metals
 S Titanium & Super Alloys
 H Hard Materials
 ● Optimal ○ Effective

ISO Taps Metric, Forming, Single Coolant Groove

suttontools

- For cold forming of threads in materials with good flow characteristics
- Through or blind holes
- Depths up to approx. 1.5 x d₁
- TiN for longer tool life

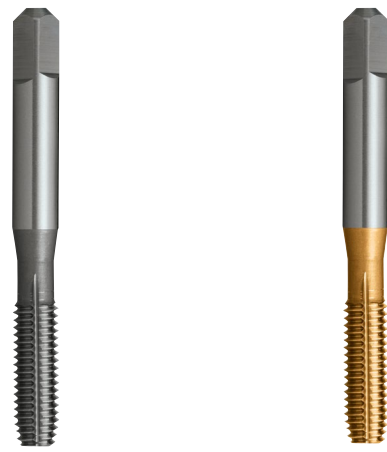

Catalogue Code	T399	T400
Discount Group	D0702	D0706
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	N	N
Geometry	Single Coolant Groove ≥ M3	Single Coolant Groove ≥ M3
Chamfer	Short	Short
Limit & Nut Tolerance	GH4 / 6H	GH4 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0250	M 2.5	x 0.45	45	10	-	2.80	2.24	5	-	2.3	T399 0250	•
0300	M 3	x 0.5	48	11	15	3.15	2.50	5	-	2.8	T399 0300	T400 0300
0350	M 3.5	x 0.6	50	13	17.5	3.55	2.80	5	-	3.2	T399 0350	•
0400	M 4	x 0.7	53	13	18	4.00	3.15	6	-	3.7	T399 0400	T400 0400
0500	M 5	x 0.8	58	16	22	5.00	4.00	7	-	4.6	T399 0500	T400 0500
0600	M 6	x 1	66	19	26	6.30	5.00	8	-	5.5	T399 0600	T400 0600
0800	M 8	x 1.25	72	22	30	8.00	6.30	9	-	7.4	T399 0800	•
1000	M 10	x 1.5	80	24	34	10.00	8.00	11	-	9.3	T399 1000	•
1200	M 12	x 1.75	89	29	-	9.00	7.10	10	-	11.2	T399 1200	•
T637												
1005	MF 10	x 1	80	24	34	10.00	8.00	11	-	9.5	T637 1005	•
1206	MF 12	x 1.25	89	29	-	9.00	7.00	10	-	11.4	T637 1206	•

M Finder

ISO	P													M			K					N						S						H																									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41										
T399	●	●	●	○	○	●																	●	●	●	●	●	●	○																														
T400	●	●	○	○	○	●	○							○									●	●	●	○	○	●	○																														


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps Metric Fine, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T401	T402
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Taper ISO 2 / 6H	Intermediate ISO 2 / 6H

Finder MF

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0503	MF 5	x 0.5	58	16	22	5.0	4.0	7	4	4.5	•	•
0604	MF 6	x 0.75	66	19	26	6.3	5.0	8	4	5.3	•	•
0805	MF 8	x 1*	72	22	30	8.0	6.3	9	4	7.0	T401 0805	T402 0805
0804	MF 8	x 0.75	72	22	30	8.0	6.3	9	4	7.3	•	•
1004	MF 10	x 0.75	80	24	34	10.0	8.0	11	4	9.3	•	•
1005	MF 10	x 1†	80	24	34	10.0	8.0	11	4	9.0	T401 1005	T402 1005
1006	MF 10	x 1.25*	80	24	34	10.0	8.0	11	4	8.8	T401 1006	T402 1006
1205	MF 12	x 1	89	29	-	9.0	7.1	10	4	11.0	T401 1205	T402 1205
1206	MF 12	x 1.25	89	29	-	9.0	7.1	10	4	10.8	T401 1206	T402 1206
1207	MF 12	x 1.5*	89	29	-	9.0	7.1	10	4	10.5	T401 1207	T402 1207
1405	MF 14	x 1	95	30	-	11.2	9.0	12	4	13.0	•	•
1406	MF 14	x 1.25†	95	30	-	11.2	9.0	12	4	12.8	T401 1406	T402 1406
1407	MF 14	x 1.5*	95	30	-	11.2	9.0	12	4	12.5	T401 1407	T402 1407
1605	MF 16	x 1	102	32	-	12.5	10.0	13	4	15.0	•	•
1606	MF 16	x 1.25	102	32	-	12.5	10.0	13	4	14.8	•	•
1607	MF 16	x 1.5*	102	32	-	12.5	10.0	13	4	14.5	T401 1607	T402 1607
1806	MF 18	x 1.25	112	37	-	14.0	11.2	14	4	16.8	•	•
1807	MF 18	x 1.5*	112	37	-	14.0	11.2	14	4	16.5	T401 1807	T402 1807
2006	MF 20	x 1.25	112	37	-	14.0	11.2	14	4	18.8	•	•
2007	MF 20	x 1.5**	112	37	-	14.0	11.2	14	4	18.5	T401 2007	T402 2007
2008	MF 20	x 2*	112	37	-	14.0	11.2	14	4	18.0	•	•
2207	MF 22	x 1.5	118	38	-	16.0	12.5	16	4	20.5	T401 2207	T402 2207
2208	MF 22	x 2	118	38	-	16.0	12.5	16	4	20.0	•	•
2407	MF 24	x 1.5	130	45	-	18.0	14.0	18	4	22.5	•	•
2408	MF 24	x 2*	130	45	-	18.0	14.0	18	4	22.0	T401 2408	T402 2408
2507	MF 25	x 1.5**	130	45	-	18.0	14.0	18	4	23.5	T401 2507	T402 2507
2708	MF 27	x 2	135	45	-	20.0	16.0	20	4	25.0	•	•
3007	MF 30	x 1.5	138	48	-	20.0	16.0	20	4	28.5	T401 3007	T402 3007
3008	MF 30	x 2	138	48	-	20.0	16.0	20	4	28.0	T401 3008	T402 3008
3207	MF 32	x 1.5**	151	51	-	22.4	18.0	22	4	30.5	T401 3207	T402 3207
4007	MF 40	x 1.5**	170	60	-	28.0	22.4	26	4	38.5	T401 4007	T402 4007

Spark Plug

1005	MF 10	x 1†	80	24	34	10.0	8.0	11	4	9.0	T401 1005	T402 1005
1206	MF 12	x 1.25	89	29	-	9.0	7.1	10	4	10.8	T401 1206	T402 1206
1406	MF 14	x 1.25†	95	30	-	11.2	9.0	12	4	12.8	T401 1406	T402 1406
1807	MF 18	x 1.5	112	37	-	14.0	11.2	14	4	16.5	T401 1807	T402 1807


ISO	P											M			K						N							S							H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T401	•	•	•	•	•	•	•																○	○	○	○	○	○	○	○																				
T402	•	•	•	•	•	•	•																○	○	○	○	○	○	○	○																				

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps Metric Fine, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance



	T403	T902
Catalogue Code	D0702	D0702
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Bottoming ISO 2 / 6H	Set ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0503	MF5	x 0.5	58	16	22	5.0	4.0	7	4	4.5	T403 0503	•
0604	MF6	x 0.75	66	19	26	6.3	5.0	8	4	5.3	T403 0604	•
0805	MF8	x 1*	72	22	30	8.0	6.3	9	4	7.0	T403 0805	T902 0805
0804	MF8	x 0.75	72	22	30	8.0	6.3	9	4	7.3	T403 0804	•
1004	MF10	x 0.75	80	24	34	10.0	8.0	11	4	9.3	T403 1004	•
1005	MF10	x 1 [†]	80	24	34	10.0	8.0	11	4	9.0	T403 1005	T902 1005
1006	MF10	x 1.25*	80	24	34	10.0	8.0	11	4	8.8	T403 1006	T902 1006
1205	MF12	x 1	89	29	-	9.0	7.1	10	4	11.0	T403 1205	•
1206	MF12	x 1.25	89	29	-	9.0	7.1	10	4	10.8	T403 1206	T902 1206
1207	MF12	x 1.5*	89	29	-	9.0	7.1	10	4	10.5	T403 1207	T902 1207
1405	MF14	x 1	95	30	-	11.2	9.0	12	4	13.0	T403 1405	•
1406	MF14	x 1.25 [†]	95	30	-	11.2	9.0	12	4	12.8	T403 1406	T902 1406
1407	MF14	x 1.5*	95	30	-	11.2	9.0	12	4	12.5	T403 1407	T902 1407
1605	MF16	x 1	102	32	-	12.5	10.0	13	4	15.0	T403 1605	•
1606	MF16	x 1.25	102	32	-	12.5	10.0	13	4	14.8	T403 1606	•
1607	MF16	x 1.5*	102	32	-	12.5	10.0	13	4	14.5	T403 1607	T902 1607
1806	MF18	x 1.25	112	37	-	14.0	11.2	14	4	16.8	T403 1806	•
1807	MF18	x 1.5*	112	37	-	14.0	11.2	14	4	16.5	T403 1807	T902 1807
2006	MF20	x 1.25	112	37	-	14.0	11.2	14	4	18.8	T403 2006	•
2007	MF20	x 1.5**	112	37	-	14.0	11.2	14	4	18.5	T403 2007	T902 2007
2008	MF20	x 2*	112	37	-	14.0	11.2	14	4	18.0	T403 2008	•
2207	MF22	x 1.5	118	38	-	16.0	12.5	16	4	20.5	T403 2207	T902 2207
2208	MF22	x 2	118	38	-	16.0	12.5	16	4	20.0	T403 2208	•
2407	MF24	x 1.5	130	45	-	18.0	14.0	18	4	22.5	T403 2407	•
2408	MF24	x 2*	130	45	-	18.0	14.0	18	4	22.0	T403 2408	T902 2408
2507	MF25	x 1.5**	130	45	-	18.0	14.0	18	4	23.5	T403 2507	•
2708	MF27	x 2	135	45	-	20.0	16.0	20	4	25.0	T403 2708	•
3007	MF30	x 1.5	138	48	-	20.0	16.0	20	4	28.5	T403 3007	•
3008	MF30	x 2	138	48	-	20.0	16.0	20	4	28.0	T403 3008	•
3207	MF32	x 1.5**	151	51	-	22.4	18.0	22	4	30.5	T403 3207	•
4007	MF40	x 1.5**	170	60	-	28.0	22.4	26	4	38.5	T403 4007	•

Spark Plug

1005	MF10	x 1 [†]	80	24	34	10.0	8.0	11	4	9.0	T403 1005	T902 1005
1206	MF12	x 1.25	89	29	-	9.0	7.1	10	4	10.8	T403 1206	T902 1206
1406	MF14	x 1.25 [†]	95	30	-	11.2	9.0	12	4	12.8	T403 1406	T902 1406
1807	MF18	x 1.5	112	37	-	14.0	11.2	14	4	16.5	T403 1807	T902 1807

ISO	P													M			K				N						S						H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T403	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
T902	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

• Optimal ○ Effective



* Alternative Metric Fine ** Conduit Metric • Available on request as special manufacture. Subject to lead time. † Limit & Nut Tolerance: ISO 1 / 4H

MF Finder

ISO Taps Metric Fine, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

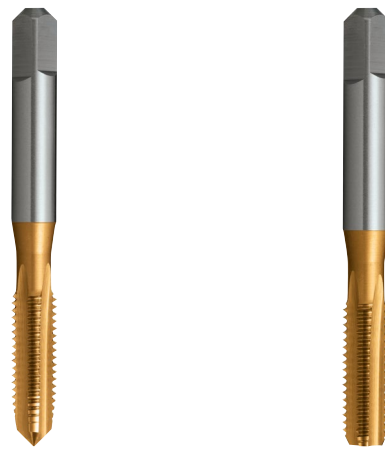

Catalogue Code	T404	T405
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TiN	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Finder MF

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0503	MF 5	x 0.5	58	16	22	5.0	4.0	7	4	4.5	•	•
0604	MF 6	x 0.75	66	19	26	6.3	5.0	8	4	5.3	•	•
0804	MF 8	x 0.75	72	22	30	8.0	6.3	9	4	7.3	•	•
1004	MF 10	x 0.75	80	24	34	10.0	8.0	11	4	9.3	•	•
1005	MF 10	x 1 [†]	80	24	34	10.0	8.0	11	4	9.0		T405 1005*
1205	MF 12	x 1	89	29	-	9.0	7.1	10	4	11.0	•	•
1405	MF 14	x 1	95	30	-	11.2	9.0	12	4	13.0		•
1605	MF 16	x 1	102	32	-	12.5	10.0	13	4	15.0		•
1606	MF 16	x 1.25	102	32	-	12.5	10.0	13	4	14.8		•
1607	MF 16	x 1.5 [^]	102	32	-	12.5	10.0	13	4	14.5	•	T405 1607*
1806	MF 18	x 1.25	112	37	-	14.0	11.2	14	4	16.8		•
1807	MF 18	x 1.5 [^]	112	37	-	14.0	11.2	14	4	16.5	•	•
2006	MF 20	x 1.25	112	37	-	14.0	11.2	14	4	18.8		•
2007	MF 20	x 1.5 ^{^^}	112	37	-	14.0	11.2	14	4	18.5	•	•
2008	MF 20	x 2 [^]	112	37	-	14.0	11.2	14	4	18.0		•
2207	MF 22	x 1.5	118	38	-	16.0	12.5	16	4	20.5	•	•
2208	MF 22	x 2	118	38	-	16.0	12.5	16	4	20.0		•
2407	MF 24	x 1.5	130	45	-	18.0	14.0	18	4	22.5		•
2408	MF 24	x 2 [*]	130	45	-	18.0	14.0	18	4	22.0	•	•
2507	MF 25	x 1.5 ^{^^}	130	45	-	18.0	14.0	18	4	23.5	•	•
2708	MF 27	x 2	135	45	-	20.0	16.0	20	4	25.0		•
3007	MF 30	x 1.5	138	48	-	20.0	16.0	20	4	28.5	•	•
3008	MF 30	x 2	138	48	-	20.0	16.0	20	4	28.0	•	•
3207	MF 32	x 1.5 ^{^^}	151	51	-	22.4	18.0	22	4	30.5	•	•
4007	MF 40	x 1.5 ^{^^}	170	60	-	28.0	22.4	26	4	38.5	•	•

Spark Plug

1005	MF 10	x 1 [†]	80	24	34	10.0	8.0	11	4	9.0		T405 1005*
------	-------	------------------	----	----	----	------	-----	----	---	-----	--	------------


ISO	P										M			K				N							S							H																									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41								
T404	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
T405	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

ISO Taps Metric Fine, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T406	T407
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Intermediate
Limit & Nut Tolerance	ISO 2 / 6H	ISO 2 / 6H

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0503	MF5	x 0.5	58	16	22	5.0	4.0	7	3	4.5	•	T407 0503
0604	MF6	x 0.75	66	19	26	6.3	5.0	8	3	5.3	•	T407 0604
0805	MF8	x 1	72	22	30	8.0	6.3	9	3	7.0	T406 0805	T407 0805
1005	MF10	x 1	80	24	34	10.0	8.0	11	3	9.0	•	T407 1005
1006	MF10	x 1.25	80	24	34	10.0	8.0	11	3	8.8	T406 1006	T407 1006
1206	MF12	x 1.25	89	29	-	9.0	7.1	10	3	10.8	•	T407 1206
1207	MF12	x 1.5	89	29	-	9.0	7.1	10	3	10.5	T406 1207	T407 1207
1407	MF14	x 1.5	95	30	-	11.2	9.0	12	3	12.5	•	T407 1407
1607	MF16	x 1.5	102	32	-	12.5	10.0	13	3	14.5	•	T407 1607
1807	MF18	x 1.5	112	37	-	14.0	11.2	14	4	16.5	•	T407 1807
2007	MF20	x 1.5	112	37	-	14.0	11.2	14	4	18.5	•	T407 2007
2207	MF22	x 1.5	118	38	-	16.0	12.5	16	4	20.5	•	T407 2207

MF Finder

ISO	P							M					K					N					S					H																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T406	●	●	●	○	○	●	○						○	○					○	○	○		○	○	○	○	○	●																			○	○	
T407	●	●	●	○	○	●	○					○	○	○					○	○	○		○	○	○	○	○	○																			○	○	


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps Metric Fine, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T408
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Intermediate
Limit & Nut Tolerance	ISO 2 / 6H

Finder MF

Size Ref.	d ₁	Pitch	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0503	MF 5	x 0.5	58	16	22	5.0	4.0	7	3	4.5	•
0604	MF 6	x 0.75	66	19	26	6.3	5.0	8	3	5.3	•
0805	MF 8	x 1	72	22	30	8.0	6.3	9	3	7.0	T408 0805
1005	MF 10	x 1	80	24	34	10.0	8.0	11	3	9.0	•
1006	MF 10	x 1.25	80	24	34	10.0	8.0	11	3	8.8	T408 1006
1206	MF 12	x 1.25	89	29	-	9.0	7.1	10	3	10.8	•
1207	MF 12	x 1.5	89	29	-	9.0	7.1	10	3	10.5	T408 1207
1407	MF 14	x 1.5	95	30	-	11.2	9.0	12	3	12.5	•
1607	MF 16	x 1.5	102	32	-	12.5	10.0	13	3	14.5	•
1807	MF 18	x 1.5	112	37	-	14.0	11.2	14	4	16.5	•
2007	MF 20	x 1.5	112	37	-	14.0	11.2	14	4	18.5	•
2207	MF 22	x 1.5	118	38	-	16.0	12.5	16	4	20.5	•


ISO	P													M			K					N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T408	●	●	●	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps UNC, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T414	T415
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brf	Brf
Sutton Designation	N	N
Geometry	-	-
Chamfer	Taper	Intermediate
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	Item #	Item #
0251	#3	48	45	10	-	2.80	2.24	5	3	GH2	T414 0251	T415 0251
0284	#4	40	48	15	14.5	3.15	2.50	5	3	GH2	T414 0284	T415 0284
0318	#5	40	48	15	15	3.15	2.50	5	3	GH2	T414 0318	T415 0318
0351	#6	32	50	17	17.5	3.55	2.80	5	3	GH3	T414 0351	T415 0351
0417	#8	32	53	13	17	4.50	3.55	6	3	GH3	T414 0417	T415 0417
0476	3/16	24 (UNS)	58	16	22	5.00	4.00	7	3	GH4	T414 0476	T415 0476
0483	#10	24	58	16	22	5.00	4.00	7	3	GH4	T414 0483	T415 0483
0549	#12	24	62	17	23	5.60	4.50	7	3	GH4	T414 0549	T415 0549
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4	T414 0635	T415 0635
0636	1/4[^]	20	66	19	25	6.30	5.00	8	3	GH3	•	•
0794	5/16[^]	18	72	22	30	8.00	6.30	9	4	GH5	T414 0794	T415 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	GH5	T414 0953	T415 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	GH3	T414 1111	T415 1111
1270	1/2	13	89	29	-	9.00	7.10	10	4	GH6	T414 1270	T415 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	GH6	T414 1429	T415 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	GH6	T414 1588	T415 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7	T414 1905	T415 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7	T414 2223	T415 2223
2540	1	8	130	45	-	18.00	14.00	18	4	GH7	T414 2540	T415 2540
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	GH8	T414 2858	T415 2858
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	GH8	T414 3175	T415 3175
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	GH8	T414 3810	T415 3810


ISO	P												M			K					N						S											H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41				
T414	●	●	●	●	●	●	●															○	○	○	○	○	○	○	○																								
T415	●	●	●	●	●	○	○															○	○	○	○	○	○	○	○	○																							

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps UNC, Straight Flute, N



- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T416	T903
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Bottoming 2B	Set 2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	Item #	Item #
0251	#3	48	45	10	-	2.80	2.24	5	3	GH2	T416 0251	•
0284	#4	40	48	15	14.5	3.15	2.50	5	3	GH2	T416 0284	T903 0284
0318	#5	40	48	15	15	3.15	2.50	5	3	GH2	T416 0318	T903 0318
0351	#6	32	50	17	17.5	3.55	2.80	5	3	GH3	T416 0351	T903 0351
0417	#8	32	53	13	17	4.50	3.55	6	3	GH3	T416 0417	T903 0417
0476	3/16	24 (UNS)	58	16	22	5.00	4.00	7	3	GH4	T416 0476	T903 0476
0483	#10	24	58	16	22	5.00	4.00	7	3	GH4	T416 0483	T903 0483
0549	#12	24	62	17	23	5.60	4.50	7	3	GH4	T416 0549	T903 0549
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4	T416 0635	T903 0635
0636	1/4^	20	66	19	25	6.30	5.00	8	3	GH3	T416 0636	•
0794	5/16^	18	72	22	30	8.00	6.30	9	4	GH5	T416 0794	T903 0794
0795	5/16	18	72	22	30	8.00	6.30	9	4	GH3	T416 0795	•
0953	3/8	16	80	24	33	10.00	8.00	11	4	GH5	T416 0953	T903 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	GH3	T416 1111	T903 1111
1270	1/2	13	89	29	-	9.00	7.10	10	4	GH6	T416 1270	T903 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	GH6	T416 1429	T903 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	GH6	T416 1588	T903 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7	T416 1905	T903 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7	T416 2223	T903 2223
2540	1	8	130	45	-	18.00	14.00	18	4	GH7	T416 2540	T903 2540
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	GH8	T416 2858	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	GH8	T416 3175	T903 3175
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	GH8	T416 3810	T903 3810

ISO	P													M			K			N						S						H																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T416	●	●	●	●	●	●	○											○	○	○	○	○	○	○	○	○	○	○	○	○	○	○																			
T903	●	●	●	●	●	○												○	○	○	○	○	○	○	○	○	○	○	○	○	○																				

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective



^ Alternative Limit • Available on request as special manufacture. Subject to lead time.



ISO Taps UNC, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

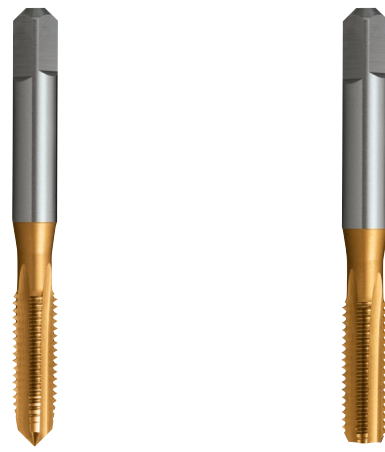

Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance

	T417	T418
Catalogue Code	T417	T418
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TIN	TIN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Limit & Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	drill Ø	Item #	Item #
0251	#3	48	45	10	-	2.80	2.24	5	3	GH2	2.1	•	•
0284	#4	40	48	15	14.5	3.15	2.50	5	3	GH2	2.3	•	•
0318	#5	40	48	15	15	3.15	2.50	5	3	GH2	2.6	•	•
0351	#6	32	50	17	17.5	3.55	2.80	5	3	GH3	2.8	T417 0351*	T418 0351*
0476	3/16	24 (UNS)	58	16	22	5.00	4.00	7	3	GH4	3.7	•	•
0483	#10	24	58	16	22	5.00	4.00	7	3	GH4	3.8		T418 0483*
0549	#12	24	62	17	23	5.60	4.50	7	3	GH4	4.5	•	•
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4	5.1	T417 0635*	T418 0635*
0636	1/4^	20	66	19	25	6.30	5.00	8	3	GH3	5.1		•
0794	5/16^	18	72	22	30	8.00	6.30	9	4	GH3	6.6		•
0795	5/16	18	72	22	30	8.00	6.30	9	4	GH5	6.6	T417 0794*	
0953	3/8	16	80	24	33	10.00	8.00	11	4	GH5	8.0	T417 0953*	
1429	9/16	12	95	30	-	11.20	9.00	12	4	GH6	12.2	•	•
1588	5/8	11	102	32	-	12.50	10.00	13	4	GH6	13.5	T417 1588*	T418 1588*
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7	16.5	T417 1905*	T418 1905*
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7	19.5	•	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7	22.2	•	•
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	GH8	25.0	•	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	GH8	28.0	•	•
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	GH8	34.0	•	•


ISO	P							M			K				N						S							H																									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41				
T417	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
T418	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

ISO Taps UNC, Straight Flute, N, Left Hand

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T419	T420
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Br	Br
Sutton Designation	N	N
Geometry	Left Hand	Left Hand
Chamfer	Taper	Intermediate
Nut Tolerance	2B LH	2B LH

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	Item #
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4 5.1	T419 0635	T420 0635
0794	5/16	18	72	22	30	8.00	6.30	9	4	GH5 6.6	T419 0794	T420 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	GH5 8.0	T419 0953	T420 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	GH5 9.4	T419 1111	T420 1111
1270	1/2	13	89	29	-	9.00	7.10	10	4	GH6 10.8	T419 1270	T420 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	GH6 12.2	T419 1429	T420 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	GH6 13.5	T419 1588	T420 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7 16.5	T419 1905	T420 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7 19.5	•	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7 22.2	•	•
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	GH8 25.0	•	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	GH8 28.0	•	•
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	GH8 34.0	•	•

UNC Finder

ISO	P											M			K				N							S										H																								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41											
T419	●	●	●	●	●	●	○																																																					
T420	●	●	●	●	●	○																																																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps UNC, Straight Flute, N, Left Hand



- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T421
Discount Group	D0702
Material	HSS
Surface Finish	Brt
Sutton Designation	N
Geometry	Left Hand
Chamfer	Bottoming
Nut Tolerance	2B LH

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	drill Ø	Item #
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4	5.1	T421 0635
0794	5/16	18	72	22	30	8.00	6.30	9	4	GH5	6.6	T421 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	GH5	8.0	T421 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	GH5	9.4	T421 1111
1270	1/2	13	89	29	-	9.00	7.10	10	4	GH6	10.8	T421 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	GH6	12.2	T421 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	GH6	13.5	T421 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7	16.5	T421 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7	19.5	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7	22.2	•
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	GH8	25.0	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	GH8	28.0	•
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	GH8	34.0	•




ISO	P								M	K								N								S								H																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41						
T421	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

ISO Taps UNC, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T422	T423
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Intermediate
Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	Item #
0284	#4	40	48	15	14.5	3.15	2.50	5	2	GH2 2.3	T422 0284	T423 0284
0351	#6	32	50	17	17.5	3.55	2.80	5	3	GH3 2.8	T422 0351	T423 0351
0417	#8	32	53	13	18	4.50	3.55	6	3	GH3 3.4	T422 0417	T423 0417
0483	#10	24	58	16	22	5.00	4.00	7	3	GH4 3.8	T422 0483	T423 0483
0549	#12	24	62	17	23	5.60	4.50	7	3	GH4 4.5	•	T423 0549
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4 5.1	T422 0635	T423 0635
0794	5/16	18	72	22	30	8.00	6.30	9	3	GH5 6.6	T422 0794	T423 0794
0953	3/8	16	80	24	33	10.00	8.00	11	3	GH5 8.0	T422 0953	T423 0953
1111	7/16	14	85	25	-	8.00	6.30	9	3	GH5 9.4	T422 1111	T423 1111
1270	1/2	13	89	29	-	9.00	7.10	10	3	GH6 10.8	T422 1270	T423 1270
1588	5/8	11	102	32	-	12.50	10.00	13	3	GH6 13.5	T422 1588	T423 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7 16.5	T422 1905	T423 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7 19.5	•	T423 2223
2540	1	8	130	45	-	18.00	14.00	18	4	GH7 22.2	•	T423 2540

UNC Finder

ISO	P										M					K					N					S					H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T422	•	•	•	•	•	•	•																																										
T423	•	•	•	•		•	•							•	•														•																				


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps UNC, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T424
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Intermediate
Nut Tolerance	2B

UNC
Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #
0284	#4	40	48	15	14.5	3.15	2.50	5	2	GH2 2.3	•
0351	#6	32	50	17	17.5	3.55	2.80	5	3	GH3 2.8	T424 0351
0417	#8	32	53	13	18	4.50	3.55	6	3	GH3 3.4	T424 0417
0483	#10	24	58	16	22	5.00	4.00	7	3	GH4 3.8	T424 0483
0549	#12	24	62	17	23	5.60	4.50	7	3	GH4 4.5	•
0635	1/4	20	66	19	25	6.30	5.00	8	3	GH4 5.1	T424 0635
0794	5/16	18	72	22	30	8.00	6.30	9	3	GH5 6.6	T424 0794
0953	3/8	16	80	24	33	10.00	8.00	11	3	GH5 8.0	T424 0953
1111	7/16	14	85	25	-	8.00	6.30	9	3	GH5 9.4	•
1270	1/2	13	89	29	-	9.00	7.10	10	3	GH6 10.8	T424 1270
1588	5/8	11	102	32	-	12.50	10.00	13	3	GH6 13.5	T424 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	GH7 16.5	T424 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7 19.5	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7 22.2	•

ISO	P																M				K				N										S										H											
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41							
T424	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

 • Optimal ○ Effective

ISO Taps UNC, Spiral Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T425	T426
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	Bottoming	Bottoming
Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	Item #	
0218	#2	56	41	8	-	2.5	2.0	-	2	GH2	1.85	T425 0218	•
0284	#4	40	48	6	-	3.15	2.50	5	3	GH2	2.3	T425 0284	•
0351	#6	32	50	6	-	3.55	2.80	5	3	GH3	2.8	T425 0351	•
0417	#8	32	53	8	18	4.50	3.55	6	3	GH3	3.4	T425 0417	•
0483	#10	24	58	11	22	5.00	4.00	7	3	GH4	3.8	T425 0483	•
0635	1/4	20	66	10	25	6.30	5.00	8	3	GH4	5.1	T425 0635	T426 0635
0794	5/16	18	72	13	30	8.00	6.30	9	3	GH5	6.6	T425 0794	T426 0794
0953	3/8	16	80	16	33	10.00	8.00	11	3	GH5	8.0	T425 0953	T426 0953
1111	7/16	14	85	18	-	8.00	6.30	9	3	GH5	9.4	T425 1111	T426 1111
1270	1/2	13	89	20	-	9.00	7.10	10	3	GH6	10.8	T425 1270	T426 1270
1588	5/8	11	102	20	-	12.50	10.00	13	3	GH6	13.5	T425 1588	T426 1588
1905	3/4	10	112	25	-	14.00	11.20	14	4	GH7	16.5	T425 1905	T426 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7	19.5	T425 2223	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7	22.2	T425 2540	•

UNC
Finder

ISO	P												M			K			N						S						H																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T425	●	●	●	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
T426	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps UNC, Spiral Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T427
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Bottoming
Nut Tolerance	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #
0218	#2	56	41	8	-	2.5	2.0	-	2	GH2 1.85	•
0284	#4	40	48	6	-	3.15	2.50	5	3	GH2 2.3	•
0351	#6	32	50	6	-	3.55	2.80	5	3	GH3 2.8	•
0417	#8	32	53	8	18	4.50	3.55	6	3	GH3 3.4	•
0483	#10	24	58	11	22	5.00	4.00	7	3	GH4 3.8	T427 0483
0635	1/4	20	66	10	25	6.30	5.00	8	3	GH4 5.1	T427 0635
0794	5/16	18	72	13	30	8.00	6.30	9	3	GH5 6.6	T427 0794
0953	3/8	16	80	16	33	10.00	8.00	11	3	GH5 8.0	T427 0953
1111	7/16	14	85	18	-	8.00	6.30	9	3	GH5 9.4	T427 1111
1270	1/2	13	89	20	-	9.00	7.10	10	3	GH6 10.8	T427 1270
1588	5/8	11	102	20	-	12.50	10.00	13	3	GH6 13.5	T427 1588
1905	3/4	10	112	25	-	14.00	11.20	14	4	GH7 16.5	T427 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	GH7 19.5	•
2540	1	8	130	45	-	18.00	14.00	18	4	GH7 22.2	•

UNC Finder

ISO	P										M			K					N										S										H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T427	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

ISO Taps UNC, Forming, Single Coolant Groove

suttontools

- For cold forming of threads in materials with good flow characteristics
- Through or blind holes
- Depths up to approx. 1.5 x d₁
- TiN for longer tool life

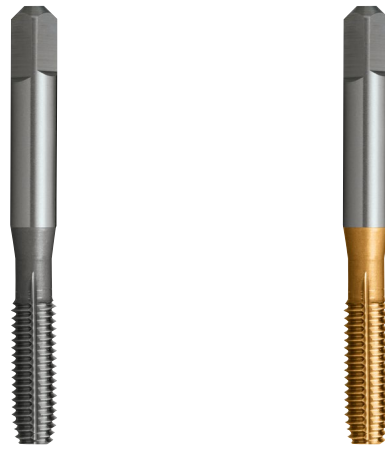

Catalogue Code	T428	T429
Discount Group	D0702	D0706
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	N	N
Geometry	Single Coolant Groove	Single Coolant Groove
Chamfer	Short	Short
Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	Item #
0318	#5	40	48	15	15	3.15	2.50	5	-	GH5 2.9	T428 0318	•
0351	#6	32	50	17	17.5	3.55	2.80	5	-	GH6 3.2	T428 0351	T429 0351
0417	#8	32	53	13	18	4.50	3.55	6	-	GH6 3.8	T428 0417	T429 0417
0483	#10	24	58	16	22	5.00	4.00	7	-	GH6 4.4	T428 0483	T429 0483
0635	1/4	20	66	19	25	6.30	5.00	8	-	GH7 5.8	T428 0635	T429 0635
0794	5/16	18	72	22	30	8.00	6.30	9	-	GH7 7.3	T428 0794	•
0953	3/8	16	80	24	33	10.00	8.00	11	-	GH7 8.8	T428 0953	•
1270	1/2	13	89	29	-	9.00	7.10	10	-	GH8 11.7	T428 1270	•

UNC Finder

ISO	P													M					K					N					S					H																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41							
T428	●	●	●	○	○	●																	●	●	●	●	●	●	○																											
T429	●	●	○	○	○	●	○							○									●	●	●	○	○	●	○																											

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps UNF, Straight Flute, N


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

ISO 529



60° UNF



Catalogue Code	T434	T435
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TiN	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Nut Tolerance	2B	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	Item #
0251	#3	56	45	10	-	2.80	2.24	5	3	GH2	2.1	•
0284	#4	48	48	15	14.5	3.15	2.50	5	3	GH2	2.35	•
0318	#5	44	48	15	15	3.15	2.50	5	3	GH2	2.65	•
0351	#6	40	50	17	17.5	3.55	2.80	5	3	GH2	2.9	•
0417	#8	36	53	13	18	4.50	3.55	6	3	GH2	3.5	•
0476	3/16	32 (UNS)	58	16	22	5.00	4.00	7	3	GH3	4.0	•
0549	#12	28	62	17	23	5.60	4.50	7	3	GH3	4.6	•
0635	1/4	28	66	19	25	6.30	5.00	8	3	GH3	5.5	T435 0635*
1429	9/16	18	95	30	-	11.20	9.00	12	4	GH5	12.8	•
1905	3/4	16	112	37	-	14.00	11.20	14	4	GH6	17.5	T435 1905*
2223	7/8	14	118	38	-	16.00	12.50	16	4	GH6	20.5	•
2540	1	12	130	45	-	18.00	14.00	18	4	GH7	23.5	•
2541	1	14 (UNS)	130	45	-	18.00	14.00	18	4	GH5	24.0	•
2858	1-1/8	12	138	48	-	20.00	16.00	20	4	GH7	26.5	•
3175	1-1/4	12	151	51	-	22.40	18.00	22	4	GH7	29.5	•
3810	1-1/2	12	170	60	-	28.00	22.40	26	4	GH7	36.0	•

UNF Finder

ISO	P										M					K					N					S					H																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T434	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
T435	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

*Not available once current stock is depleted. • Available on request as special manufacture. Subject to lead time.

ISO Taps UNF, Straight Flute, N, Left Hand



- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Nut Tolerance

	T436	T437
Catalogue Code	T436	T437
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	<i>Brt</i>	<i>Brt</i>
Sutton Designation	N	N
Geometry	Left Hand	Left Hand
Chamfer	Taper	Intermediate
Nut Tolerance	2B LH	2B LH

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	drill Ø	Item #	Item #
0635	1/4	28	66	19	25	6.30	5.00	8	3	GH3	5.5	T436 0635	T437 0635
0794	5/16	24	72	22	30	8.00	6.30	9	4	GH4	6.9	T436 0794	T437 0794
0953	3/8	24	80	24	33	10.00	8.00	11	4	GH4	8.5	T436 0953	T437 0953
1111	7/16	20	85	25	-	8.00	6.30	9	4	GH5	9.8	T436 1111	T437 1111
1270	1/2	20	89	29	-	9.00	7.10	10	4	GH5	11.5	T436 1270	T437 1270
1429	9/16	18	95	30	-	11.20	9.00	12	4	GH5	12.8	T436 1429	T437 1429
1588	5/8	18	102	32	-	12.50	10.00	13	4	GH5	14.5	T436 1588	T437 1588
1905	3/4	16	112	37	-	14.00	11.20	14	4	GH6	17.5	T436 1905	T437 1905

(This area contains multiple rows of blank horizontal lines, likely representing a continuation of the product list or a placeholder for additional data.)

ISO	P								M			K				N							S								H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T436	●	●	●	●	●	●	○													○	○	○	○	○	○	○	○	○	○	○	○	○	○																		
T437	●	●	●	●	●	○														○	○	○	○	○	○	○	○	○	○	○	○																				


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

ISO Taps UNF, Straight Flute, N, Left Hand

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T438
Discount Group	D0702
Material	HSS
Surface Finish	Brt
Sutton Designation	N
Geometry	Left Hand
Chamfer	Bottoming
Nut Tolerance	2B LH

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	
0635	1/4	28	66	19	25	6.30	5.00	8	3	GH3	5.5	T438 0635
0794	5/16	24	72	22	30	8.00	6.30	9	4	GH4	6.9	T438 0794
0953	3/8	24	80	24	33	10.00	8.00	11	4	GH4	8.5	T438 0953
1111	7/16	20	85	25	-	8.00	6.30	9	4	GH5	9.8	T438 1111
1270	1/2	20	89	29	-	9.00	7.10	10	4	GH5	11.5	T438 1270
1429	9/16	18	95	30	-	11.20	9.00	12	4	GH5	12.8	T438 1429
1588	5/8	18	102	32	-	12.50	10.00	13	4	GH5	14.5	T438 1588
1905	3/4	16	112	37	-	14.00	11.20	14	4	GH6	17.5	T438 1905

UNF Finder

ISO	P										M			K				N						S							H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T438	●	●	●	●	●	○									○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

ISO Taps UNEF, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T445	T446
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	<i>Br</i>	<i>Br</i>
Sutton Designation	N	N
Geometry	Extra Fine	Extra Fine
Chamfer	Taper	Intermediate
Nut Tolerance	2B	2B

UNEF Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill ∅	Item #	Item #	
UNEF Series													
0635	1/4	32	66	19	25	6.30	5.00	8	3	GH3	5.6	T445 0635	T446 0635
0794	5/16	32	72	22	30	8.00	6.30	9	4	GH4	7.2	T445 0794	T446 0794
0953	3/8	32	80	24	33	10.00	8.00	11	4	GH4	8.8	T445 0953	T446 0953
1270	1/2	28	89	29	-	9.00	7.10	10	4	GH5	11.8	T445 1270	T446 1270
1588	5/8	24	102	32	-	12.50	10.00	13	4	GH5	14.75	T445 1588	T446 1588
1905	3/4	20	112	37	-	14.00	11.20	14	4	GH6	18.0	T445 1905	T446 1905
2540	1	20	130	45	-	18.00	14.00	18	4	GH7	24.2	T445 2540	T446 2540

Tyre Valve Tap (UNS)

0533	5V1	36	62	17	23	5.60	4.50	7	3	4.6	•	•
-------------	------------	----	----	----	----	------	------	---	---	-----	---	---

Stitching Tap

0655	#1	64	36	-	8.08	6.15	9.5	4	5.0	•	•
-------------	-----------	----	----	---	------	------	-----	---	-----	---	---


ISO	P							M			K					N						S							H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T445	●	●	●	●	●	●	○															○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T446	●	●	●	●	●	○	○															○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps UNEF, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T447
Discount Group	D0702
Material	HSS
Surface Finish	Brt
Sutton Designation	N
Geometry	Extra Fine
Chamfer	Bottoming
Nut Tolerance	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	
UNEF Series												
0635	1/4	32	66	19	25	6.30	5.00	8	3	GH3	5.6	T447 0635
0794	5/16	32	72	22	30	8.00	6.30	9	4	GH4	7.2	T447 0794
0953	3/8	32	80	24	33	10.00	8.00	11	4	GH4	8.8	T447 0953
1270	1/2	28	89	29	-	9.00	7.10	10	4	GH5	11.8	T447 1270
1588	5/8	24	102	32	-	12.50	10.00	13	4	GH5	14.75	T447 1588
1905	3/4	20	112	37	-	14.00	11.20	14	4	GH6	18.0	T447 1905
2540	1	20	130	45	-	18.00	14.00	18	4	GH7	24.2	T447 2540
Tyre Valve Tap (UNS)												
0533	5V1	36	62	17	23	5.60	4.50	7	3	4.6	T489 0533	
Stitching Tap												
0655	#1		64	36	-	8.08	6.15	9.5	4	5.0	T490 0655	

UNEF Finder


ISO	P								M			K			N								S								H												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
T447	●	●	●	●	●	○	○									○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T489	●	●	●	●	●	○	○									○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T490	●	●	●	●	●	○	○									○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel
 M Stainless Steel
 K Cast Iron
 N Non-Ferrous Metals
 S Titanium & Super Alloys
 H Hard Materials
 ● Optimal ○ Effective

ISO Taps UNF, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T439	T440
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Intermediate
Nut Tolerance	2B	2B

UNF
Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	drill Ø	Item #	Item #
0483	#10	32	58	16	22	5.00	4.00	7	3	GH3	4.1	T439 0483	T440 0483
0635	1/4	28	66	19	25	6.30	5.00	8	3	GH3	5.5	T439 0635	T440 0635
0794	5/16	24	72	22	30	8.00	6.30	9	3	GH4	6.9	T439 0794	T440 0794
0953	3/8	24	80	24	33	10.00	8.00	11	3	GH4	8.5	T439 0953	T440 0953
1111	7/16	20	85	25	-	8.00	6.30	9	3	GH5	9.8	T439 1111	T440 1111
1270	1/2	20	89	29	-	9.00	7.10	10	3	GH5	11.5	T439 1270	T440 1270
1588	5/8	18	102	32	-	12.50	10.00	13	3	GH5	12.8	T439 1588	T440 1588
1905	3/4	16	112	37	-	14.00	11.20	14	4	GH6	17.5	T439 1905	T440 1905
2223	7/8	14	118	38	-	16.00	12.50	16	4	GH6	20.5	•	T440 2223
2540	1	12	130	45	-	18.00	14.00	18	4	GH7	23.5	•	T440 2540


ISO	P										M			K				N						S						H																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T439	●	●	○	○	○	●	○							○	○									○	○	○																										
T440	●	●	●	●	●	○	○							○	○														●	○																						

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps UNF, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T441
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Intermediate
Nut Tolerance	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #	
0483	#10	32	58	16	22	5.00	4.00	7	3	GH3	4.1	T441 0483
0635	1/4	28	66	19	25	6.30	5.00	8	3	GH3	5.5	T441 0635
0794	5/16	24	72	22	30	8.00	6.30	9	3	GH4	6.9	T441 0794
0953	3/8	24	80	24	33	10.00	8.00	11	3	GH4	8.5	T441 0953
1111	7/16	20	85	25	-	8.00	6.30	9	3	GH5	9.8	•
1270	1/2	20	89	29	-	9.00	7.10	10	3	GH5	11.5	T441 1270
1588	5/8	18	102	32	-	12.50	10.00	13	3	GH5	12.8	T441 1588
1905	3/4	16	112	37	-	14.00	11.20	14	4	GH6	17.5	T441 1905
2223	7/8	14	118	38	-	16.00	12.50	16	4	GH6	20.5	•
2540	1	12	130	45	-	18.00	14.00	18	4	GH7	23.5	•

UNF Finder



ISO	P										M					K					N							S							H																	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T441	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps UNF, Spiral Flute, N

suttontools


- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁

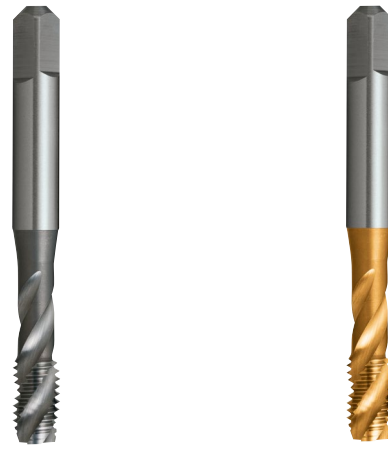

Catalogue Code	T442	T443
Discount Group	D0702	D0706
Material	HSSE	HSSE
Surface Finish	Br	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Bottoming	Bottoming
Nut Tolerance	2B	2B

UNF
Finder

Size Ref	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit	drill Ø	Item #	Item #
0483	#10	32	58	11	22	5.00	4.00	7	3	GH3	4.1	T442 0483	T443 0483
0635	1/4	28	66	10	25	6.30	5.00	8	3	GH3	5.5	T442 0635	T443 0635
0794	5/16	24	72	13	30	8.00	6.30	9	3	GH4	6.9	T442 0794	T443 0794
0953	3/8	24	80	16	33	10.00	8.00	11	3	GH4	8.5	T442 0953	T443 0953
1111	7/16	20	85	18	-	8.00	6.30	9	3	GH5	9.8	T442 1111	•
1270	1/2	20	89	20	-	9.00	7.10	10	3	GH5	11.5	T442 1270	T443 1270
1588	5/8	18	102	20	-	12.50	10.00	13	3	GH5	12.8	T442 1588	T443 1588
1905	3/4	16	112	25	-	14.00	11.20	14	4	GH6	17.5	T442 1905	T443 1905



ISO	P													M			K					N					S					H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T442	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T443	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time.

ISO Taps UNF, Forming, Single Coolant Groove



suttontools

- For cold forming of threads in materials with good flow characteristics
- Through or blind holes
- Depths up to approx. 1.5 x d₁



Catalogue Code	T444
Discount Group	D0702
Material	HSSE
Surface Finish	Br
Sutton Designation	N
Geometry	Single Coolant Groove
Chamfer	Short
Nut Tolerance	2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	Limit drill Ø	Item #
0635	1/4	28	66	19	25	6.30	5.00	7	-	GH7 6.0	T444 0635
0794	5/16	24	72	22	30	8.00	6.30	8	-	GH7 7.5	T444 0794
0953	3/8	24	80	24	33	10.00	8.00	9	-	GH7 9.0	T444 0953
1270	1/2	20	89	29	-	9.00	7.10	10	-	GH8 12.1	T444 1270

Multiple empty rows representing a table for various sizes, following the same structure as the first table.

ISO	P														M					K					N					S						H														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T444	●	●	○	○		●																	●	●	●	●		●	○																					


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

UNF Finder

ISO Taps 8UN, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T448	T449
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Br_t	Br_t
Sutton Designation	N	N
Geometry	Extra Fine	Extra Fine
Chamfer	Taper	Intermediate
Limit & Nut Tolerance	GH8/2B	GH8/2B

8UN Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
2858	1-1/8	8	138	48	-	20.00	16.00	20	4	25.5	T448 2858	T449 2858
3175	1-1/4	8	151	51	-	22.40	18.00	22	4	28.5	T448 3175	T449 3175
3493	1-3/8	8	162	57	-	25.00	20.00	24	4	31.75	T448 3493	T449 3493
3810	1-1/2	8	170	60	-	28.00	22.40	26	4	35.0	T448 3810	T449 3810
4128	1-5/8	8	170	60	-	28.00	22.40	26	4	38.0	T448 4128	T449 4128
4445	1-3/4	8	187	67	-	31.50	25.00	28	4	41.5	T448 4445	T449 4445
4763	1-7/8	8	187	67	-	31.50	25.00	28	4	44.5	T448 4763	T449 4763
5080	2	8	200	70	-	35.50	28.00	31	4	47.5	T448 5080	T449 5080
6033	2-3/8	8	221	76	-	40.00	31.50	34	6	57.15	•	•


ISO	P							M	K				N					S					H																														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41				
T448	●	●	●	●	●	○	○										○	○	○	○	○	○	○	○	○	○	○	○																									
T449	●	●	●	●		○	○										○	○	○	○	○	○	○	○	○	○	○	○	○																								

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps 8UN, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T450	T910
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Br	Br
Sutton Designation	N	N
Geometry	Extra Fine	Extra Fine
Chamfer	Bottoming	Set
Limit & Nut Tolerance	GH8/2B	GH8/2B

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
2858	1-1/8	8	138	48	-	20.00	16.00	20	4	25.5	T450 2858	T910 2858
3175	1-1/4	8	151	51	-	22.40	18.00	22	4	28.5	T450 3175	T910 3175
3493	1-3/8	8	162	57	-	25.00	20.00	24	4	31.75	T450 3493	T910 3493
3810	1-1/2	8	170	60	-	28.00	22.40	26	4	35.0	T450 3810	T910 3810
4128	1-5/8	8	170	60	-	28.00	22.40	26	4	38.0	T450 4128	T910 4128
4445	1-3/4	8	187	67	-	31.50	25.00	28	4	41.5	T450 4445	T910 4445
4763	1-7/8	8	187	67	-	31.50	25.00	28	4	44.5	T450 4763	T910 4763
5080	2	8	200	70	-	35.50	28.00	31	4	47.5	T450 5080	T910 5080
6033	2-3/8	8	221	76	-	40.00	31.50	34	6	57.15	•	•

8UN Finder

ISO	P													M			K			N						S						H																	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T450	●	●	●	●	●	●	○																○	○	○	○	○	○	○	○	○	○																	
T910	●	●	●	●	●	●	○																○	○	○	○	○	○	○	○	○	○																	

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps BSW, Straight Flute, N


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

ISO
529




55°
BSW



Catalogue Code	T451	T452
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	Taper	Intermediate
Limit & Nut Tolerance	Z3 Medium	Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0238	3/32	48(WHT)	45	10	-	2.80	2.24	5	3	1.85	T451 0238	T452 0238
0318	1/8	40	48	15	15	3.15	2.50	5	3	2.55	T451 0318	T452 0318
0397	5/32	32(WHT)	53	17	17	4.00	3.15	6	3	3.2	T451 0397	T452 0397
0476	3/16	24	58	16	22	5.00	4.00	7	3	3.7	T451 0476	T452 0476
0556	7/32	24(WHT)	62	17	23	5.60	4.50	7	3	4.5	T451 0556	T452 0556
0635	1/4	20	66	19	25	6.30	5.00	8	3	5.1	T451 0635	T452 0635
0794	5/16	18	72	22	30	8.00	6.30	9	4	6.5	T451 0794	T452 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	7.9	T451 0953	T452 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	9.3	T451 1111	T452 1111
1270	1/2	12	89	29	-	9.00	7.10	10	4	10.5	T451 1270	T452 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	12.1	T451 1429	T452 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	13.5	T451 1588	T452 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	16.25	T451 1905	T452 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	19.25	T451 2223	T452 2223
2540	1	8	130	45	-	18.00	14.00	18	4	22.0	T451 2540	T452 2540
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	24.75	T451 2858	T452 2858
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	28.0	T451 3175	T452 3175
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	33.5	T451 3810	T452 3810
4445	1-3/4	5	187	67	-	31.50	25.00	28	4	39.0	T451 4445	T452 4445
5080	2	4-1/2	200	70	-	35.50	28.00	31	4	44.5	T451 5080	T452 5080



ISO	P							M			K					N							S							H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T451	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T452	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel
M Stainless Steel
K Cast Iron
N Non-Ferrous Metals
S Titanium & Super Alloys
H Hard Materials
● Optimal ○ Effective

BSW Finder

ISO Taps BSW, Straight Flute, N


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

ISO
529



55°
BSW



Catalogue Code
Discount Group
Material
Surface Finish
Sutton Designation
Geometry
Chamfer
Limit & Nut Tolerance



T453

T905

D0702

D0702

HSS

HSS

Brt

Brt

N

N

-

-

Bottoming

Set

Z3 Medium

Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0238	3/32	48(WHIT)	45	10	-	2.80	2.24	5	3	1.85	T453 0238	T905 0238
0318	1/8	40	48	15	15	3.15	2.50	5	3	2.55	T453 0318	T905 0318
0397	5/32	32(WHIT)	53	17	17	4.00	3.15	6	3	3.2	T453 0397	T905 0397
0476	3/16	24	58	16	22	5.00	4.00	7	3	3.7	T453 0476	T905 0476
0556	7/32	24(WHIT)	62	17	23	5.60	4.50	7	3	4.5	T453 0556	T905 0556
0635	1/4	20	66	19	25	6.30	5.00	8	3	5.1	T453 0635	T905 0635
0794	5/16	18	72	22	30	8.00	6.30	9	4	6.5	T453 0794	T905 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	7.9	T453 0953	T905 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	9.3	T453 1111	T905 1111
1270	1/2	12	89	29	-	9.00	7.10	10	4	10.5	T453 1270	T905 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	12.1	T453 1429	T905 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	13.5	T453 1588	T905 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	16.25	T453 1905	T905 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	19.25	T453 2223	T905 2223
2540	1	8	130	45	-	18.00	14.00	18	4	22.0	T453 2540	T905 2540
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	24.75	T453 2858	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	28.0	T453 3175	•
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	33.5	T453 3810	•
4445	1-3/4	5	187	67	-	31.50	25.00	28	4	39.0	T453 4445	•
5080	2	4-1/2	200	70	-	35.50	28.00	31	4	44.5	T453 5080	•

BSW
Finder



ISO	P												M			K			N					S										H																	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T453	●	●	●	●	●	●	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T905	●	●	●	●	●	●	○							○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel **M** Stainless Steel **K** Cast Iron **N** Non-Ferrous Metals **S** Titanium & Super Alloys **H** Hard Materials ● Optimal ○ Effective

ISO Taps BSW, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁

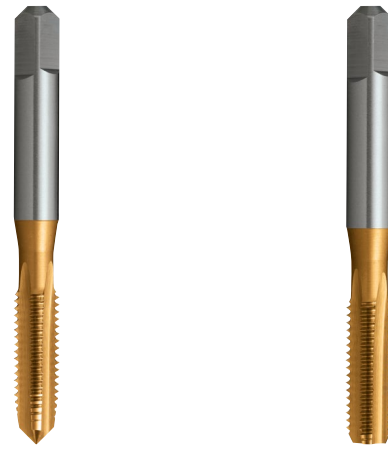

Catalogue Code	T454	T455
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TiN	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Limit & Nut Tolerance	Z3 Medium	Z3 Medium

BSW
Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0238	3/32	48(WHT)	45	10	-	2.80	2.24	5	3	1.85	•	•
0318	1/8	40	48	15	15	3.15	2.50	5	3	2.55	•	T455 0318*
0556	7/32	24(WHT)	62	17	23	5.60	4.50	7	3	4.5	•	•
1270	1/2	12	89	29	-	9.00	7.10	10	4	10.5	T454 1270*	T455 1270*
1429	9/16	12	95	30	-	11.20	9.00	12	4	12.1	•	•
2223	7/8	9	118	38	-	16.00	12.50	16	4	19.25	•	•
2540	1	8	130	45	-	18.00	14.00	18	4	22.0	•	•
2858	1-1/8	7	138	48	-	20.00	16.00	20	4	24.75	•	•
3175	1-1/4	7	151	51	-	22.40	18.00	22	4	28.0	•	•
3810	1-1/2	6	170	60	-	28.00	22.40	26	4	33.5	•	•
4445	1-3/4	5	187	67	-	31.50	25.00	28	4	39.0	•	•
5080	2	4-1/2	200	70	-	35.50	28.00	31	4	44.5	•	•


ISO	P											M			K							N							S											H										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T454	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
T455	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

ISO Taps BSW, Straight Flute, N, Left Hand


suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T456
Discount Group	D0702
Material	HSS
Surface Finish	Br _t
Sutton Designation	N
Geometry	Left Hand
Chamfer	Bottoming
Limit & Nut Tolerance	Z3 LH Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0635	1/4	20	66	19	25	6.30	5.00	8	3	5.1	T456 0635
0794	5/16	18	72	22	30	8.00	6.30	9	4	6.5	T456 0794
0953	3/8	16	80	24	33	10.00	8.00	11	4	7.9	T456 0953
1111	7/16	14	85	25	-	8.00	6.30	9	4	9.3	T456 1111
1270	1/2	12	89	29	-	9.00	7.10	10	4	10.5	T456 1270
1429	9/16	12	95	30	-	11.20	9.00	12	4	12.1	T456 1429
1588	5/8	11	102	32	-	12.50	10.00	13	4	13.5	T456 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	16.25	T456 1905



ISO	P												M			K				N							S							H																
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T456	●	●	●	●	○																																													

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

BSW Finder

ISO Taps BSW, Gun, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T457	T458
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Br	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Intermediate
Limit & Nut Tolerance	Z3 Medium	Z3 Medium

BSW
Finder


Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0318	1/8	40	48	15	15	3.15	2.50	5	3	2.55	T457 0318	T458 0318
0397	5/32	32(WHT)	53	17	17	4.00	3.15	6	3	3.2	T457 0397	T458 0397
0476	3/16	24	58	16	22	5.00	4.00	7	3	3.7	T457 0476	T458 0476
0635	1/4	20	66	19	25	6.30	5.00	8	3	5.1	T457 0635	T458 0635
0794	5/16	18	72	22	30	8.00	6.30	9	3	6.5	T457 0794	T458 0794
0953	3/8	16	80	24	33	10.00	8.00	11	3	7.9	T457 0953	T458 0953
1111	7/16	14	85	25	-	8.00	6.30	9	3	9.3	T457 1111	T458 1111
1270	1/2	12	89	29	-	9.00	7.10	10	3	10.5	T457 1270	T458 1270
1588	5/8	11	102	32	-	12.50	10.00	13	3	13.5	T457 1588	T458 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	16.25	T457 1905	T458 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	19.25	•	T458 2223
2540	1	8	130	45	-	18.00	14.00	18	4	22.0	•	T458 2540

ISO	P								M			K				N						S								H																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T457	●	●	●	○	○	●	○							○	○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T458	●	●	●	○	○	○	○							○	○				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 3 x d₁



Catalogue Code	T459
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Intermediate
Limit & Nut Tolerance	Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0318	1/8	40	48	15	15	3.15	2.50	5	3	2.55	T459 0318
0397	5/32	32(WHIT)	53	17	17	4.00	3.15	6	3	3.2	T459 0397
0476	3/16	24	58	16	22	5.00	4.00	7	3	3.7	T459 0476
0635	1/4	20	66	19	25	6.30	5.00	8	3	5.1	T459 0635
0794	5/16	18	72	22	30	8.00	6.30	9	3	6.5	T459 0794
0953	3/8	16	80	24	33	10.00	8.00	11	3	7.9	T459 0953
1111	7/16	14	85	25	-	8.00	6.30	9	3	9.3	•
1270	1/2	12	89	29	-	9.00	7.10	10	3	10.5	T459 1270
1588	5/8	11	102	32	-	12.50	10.00	13	3	13.5	T459 1588
1905	3/4	10	112	37	-	14.00	11.20	14	4	16.25	T459 1905
2223	7/8	9	118	38	-	16.00	12.50	16	4	19.25	•
2540	1	8	130	45	-	18.00	14.00	18	4	22.0	•



ISO	P													M			K					N										S										H							
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T459	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps BSW, Spiral Flute, N

suttontools


- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T460	T461
Discount Group	D0702	D0702
Material	HSSE	HSSE
Surface Finish	Brt	Blu
Sutton Designation	N	N
Geometry	-	-
Chamfer	-	-
Limit & Nut Tolerance	Bottoming Z3 Medium	Bottoming Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0318	1/8	40	48	6	15	3.15	2.50	5	3	2.55	T460 0318	•
0397	5/32	32(WHT)	53	7	17	4.00	3.15	6	3	3.2	T460 0397	•
0476	3/16	24	58	11	22	5.00	4.00	7	3	3.7	T460 0476	•
0635	1/4	20	66	10	25	6.30	5.00	8	3	5.1	T460 0635	T461 0635
0794	5/16	18	72	13	30	8.00	6.30	9	3	6.5	T460 0794	T461 0794
0953	3/8	16	80	16	33	10.00	8.00	11	3	7.9	T460 0953	T461 0953
1111	7/16	14	85	18	-	8.00	6.30	9	3	9.3	T460 1111	T461 1111
1270	1/2	12	89	20	-	9.00	7.10	10	3	10.5	T460 1270	T461 1270
1588	5/8	11	102	20	-	12.50	10.00	13	3	13.5	T460 1588	T461 1588
1905	3/4	10	112	25	-	14.00	11.20	14	4	16.25	T460 1905	T461 1905
2223	7/8	9	118	28	-	16.00	12.50	16	4	19.25	T460 2223	•
2540	1	8	130	35	-	18.00	14.00	18	4	22.0	T460 2540	•

BSW
Finder




ISO	P							M	K							N							S							H																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T460	●	●	○	○	○	○	○																																										
T461	●	●	●	●	●	○																						●	○	○																			○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps BSW, Spiral Flute, N



- General purpose use
- Suitable for materials up to 1000N/mm²
- Blind holes
- Depths up to approx. 2.5 x d₁



Catalogue Code	T462
Discount Group	D0706
Material	HSSE
Surface Finish	TiN
Sutton Designation	N
Geometry	-
Chamfer	Bottoming
Limit & Nut Tolerance	Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0318	1/8	40	48	6	15	3.15	2.50	5	3	2.55	•
0397	5/32	32(WHIT)	53	7	17	4.00	3.15	6	3	3.2	•
0476	3/16	24	58	11	22	5.00	4.00	7	3	3.7	T462 0476
0635	1/4	20	66	10	25	6.30	5.00	8	3	5.1	T462 0635
0794	5/16	18	72	13	30	8.00	6.30	9	3	6.5	T462 0794
0953	3/8	16	80	16	33	10.00	8.00	11	3	7.9	T462 0953
1111	7/16	14	85	18	-	8.00	6.30	9	3	9.3	•
1270	1/2	12	89	20	-	9.00	7.10	10	3	10.5	T462 1270
1588	5/8	11	102	20	-	12.50	10.00	13	3	13.5	T462 1588
1905	3/4	10	112	25	-	14.00	11.20	14	4	16.25	•
2223	7/8	9	118	28	-	16.00	12.50	16	4	19.25	•
2540	1	8	130	35	-	18.00	14.00	18	4	22.0	•

ISO	P										M					K					N					S					H																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T462	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials
 ● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps BSW, Forming, Single Coolant Groove

suttontools

- For cold forming of threads in materials with good flow characteristics
- Through or blind holes
- Depths up to approx. 1.5 x d₁
- TiN for longer tool life



Catalogue Code	T463	T464
Discount Group	D0702	D0706
Material	HSSE	HSSE
Surface Finish	Brt	TiN
Sutton Designation	N	N
Geometry	Single Coolant Groove	Single Coolant Groove
Chamfer	Short	Short
Limit & Nut Tolerance	Z3 Medium	Z3 Medium



BSW
Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0318	1/8	40	48	15	15	3.15	2.50	5	-	2.9	T463 0318	•
0397	5/32	32(WHT)	53	17	17	4.00	3.15	6	-	3.6	T463 0397	T464 0397
0476	3/16	24	58	16	22	5.00	4.00	7	-	4.3	T463 0476	T464 0476
0635	1/4	20	66	19	25	6.30	5.00	8	-	5.8	T463 0635	•
0794	5/16	18	72	22	30	8.00	6.30	9	-	7.3	T463 0794	•
0953	3/8	16	80	24	33	10.00	8.00	11	-	8.8	T463 0953	•


ISO	P													M			K						N						S						H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
T463	•	•	•	•	•	•																	•	•	•	•	•	•	•																					
T464	•	•	•	•	•	•	•							•									•	•	•	•	•	•	•	•																				

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials • Optimal ○ Effective

ISO Taps BSW, Machine Nut, Long Shank

suttontools

- Suited to long reach applications
- Suitable for materials up to 1000N/mm²
- Through holes
- Depths up to approx. 2 x d₁



Catalogue Code	T465
Discount Group	D0702
Material	HSS
Surface Finish	Brt
Sutton Designation	Nut
Geometry	-
Chamfer	Bottoming
Limit & Nut Tolerance	Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
0635	1/4	20	110	38	-	4.5	3.55	6	4	5.1	T465 0635
0794	5/16	18	125	43	-	6	4.5	7	4	6.5	T465 0794
0953	3/8	16	140	48	-	7	5.6	8	4	7.9	T465 0953
1270	1/2	12	180	59	-	9.5	7.5	10	4	10.5	T465 1270
1588	5/8	11	200	70	-	12.5	10.0	13	4	13.5	T465 1588
1905	3/4	10	250	76	-	14	11.2	14	4	16.25	T465 1905
2540	1	8	280	95	-	18	14.0	18	4	22.0	T465 2540

BSW Finder


ISO	P							M							K							N							S							H													
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T465	●	●	●	●	●	●	○																																										

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

ISO Taps BSF, BSB & BA, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T466	T467
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brf	Brf
Sutton Designation	N	N
Geometry	-	-
Chamfer	Taper	Intermediate
Limit & Nut Tolerance	Z3 Medium	Z3 Medium

BSF
Finder

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill ∅	Item #	Item #
BSF												
0476	3/16	32	58	16	22	5.00	4.00	7	3	4.0	T466 0476	T467 0476
0635	1/4	26	66	19	25	6.30	5.00	8	3	5.3	T466 0635	T467 0635
0794	5/16	22	72	22	30	8.00	6.30	9	4	6.8	T466 0794	T467 0794
0953	3/8	20	80	24	33	10.00	8.00	11	4	8.3	T466 0953	T467 0953
1111	7/16	18	85	25	-	8.00	6.30	9	4	9.8	T466 1111	T467 1111
1270	1/2	16	89	29	-	9.00	7.10	10	4	11.0	T466 1270	T467 1270
1429	9/16	16	95	30	-	11.20	9.00	12	4	12.7	T466 1429	T467 1429
1588	5/8	14	102	32	-	12.50	10.00	13	4	14.0	T466 1588	T467 1588
1905	3/4	12	112	37	-	14.00	11.20	14	4	16.75	T466 1905	T467 1905
2223	7/8	11	118	38	-	16.00	12.50	16	4	19.75	T466 2223	T467 2223
2540	1	10	130	45	-	18.00	14.00	18	4	22.75	T466 2540	T467 2540

											T472	T473
BSB												
0635	1/4	26(BSF)	66	19	25	6.30	5.00	8	3	5.2	T466 0635	T467 0635
0794	5/16*	26	72	22	30	8.00	6.30	9	4	6.8	T472 0794	T473 0794
0953	3/8*	26	80	24	33	10.00	8.00	11	4	8.4	T472 0953	T473 0953
1111	7/16*	26	85	25	-	8.00	6.30	9	4	10.0	T472 1111	T473 1111
1270	1/2*	26	89	29	-	9.00	7.10	10	4	11.6	T472 1270	T473 1270
1429	9/16*	26	95	30	-	11.20	9.00	12	4	13.2	•	•
1588	5/8*	26	102	32	-	12.50	10.00	13	4	14.8	•	•
1905	3/4*	26	112	37	-	14.00	11.20	14	4	18.0	•	•
2223	7/8*	26	118	38	-	16.00	12.50	16	4	20.8	•	•
2540	1*	26	130	45	-	18.00	14.00	18	4	24.3	•	•

											T469	T470
BA												
0600	0	1	66	19	26	6.30	5.00	8	3	5.1	T469 0600	T470 0600
0530	1	0.9	62	17	23	5.60	4.50	7	3	4.5	T469 0530	T470 0530
0470	2	0.81	58	16	22	5.00	4.00	7	3	4.0	T469 0470	T470 0470
0410	3	0.73	53	13	18	4.50	3.55	6	3	3.4	T469 0410	T470 0410
0360	4	0.66	50	17	-	3.55	2.80	5	3	3.0	T469 0360	T470 0360
0320	5	0.59	48	15	-	3.15	2.50	5	3	2.65	T469 0320	T470 0320
0280	6	0.53	48	15	-	3.15	2.50	5	3	2.3	T469 0280	T470 0280
0250	7	0.48	45	10	-	2.80	2.24	5	3	2.05	T469 0250	T470 0250
0220	8	0.43	45	10	-	2.80	2.24	5	3	1.8	T469 0220	T470 0220
0190	9	0.39	41	8	-	2.50	2.00	4	3	1.55	T469 0190	T470 0190
0170	10	0.35	41	8	-	2.50	2.00	4	3	1.4	T469 0170	T470 0170


ISO	P							M			K				N							S							H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T466 / T467	•	•	•	•	•	•	•																																										
T472 / T473	•	•	•	•	•	•	•																																										
T469 / T470	•	•	•	•	•	•	•																																										

P Steel
 M Stainless Steel
 K Cast Iron
 N Non-Ferrous Metals
 S Titanium & Super Alloys
 H Hard Materials
 ● Optimal
 ○ Effective

ISO Taps BSF, BSB & BA, Straight Flute, N

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁



Catalogue Code	T468	T906
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	<i>Brt</i>	<i>Brt</i>
Sutton Designation	N	N
Geometry	-	-
Chamfer	Bottoming	Set
Limit & Nut Tolerance	Z3 Medium	Z3 Medium

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
BSF												
0476	3/16	32	58	16	22	5.00	4.00	7	3	4.0	T468 0476	T906 0476
0635	1/4	26	66	19	25	6.30	5.00	8	3	5.3	T468 0635	T906 0635
0794	5/16	22	72	22	30	8.00	6.30	9	4	6.8	T468 0794	T906 0794
0953	3/8	20	80	24	33	10.00	8.00	11	4	8.3	T468 0953	T906 0953
1111	7/16	18	85	25	-	8.00	6.30	9	4	9.8	T468 1111	T906 1111
1270	1/2	16	89	29	-	9.00	7.10	10	4	11.0	T468 1270	T906 1270
1429	9/16	16	95	30	-	11.20	9.00	12	4	12.7	T468 1429	•
1588	5/8	14	102	32	-	12.50	10.00	13	4	14.0	T468 1588	•
1905	3/4	12	112	37	-	14.00	11.20	14	4	16.75	T468 1905	•
2223	7/8	11	118	38	-	16.00	12.50	16	4	19.75	T468 2223	•
2540	1	10	130	45	-	18.00	14.00	18	4	22.75	T468 2540	•

BSB													T474	T908
0635	1/4	26(BSF)	66	19	25	6.30	5.00	8	3	5.2	T468 0635	T906 0635		
0794	5/16*	26	72	22	30	8.00	6.30	9	4	6.8	T474 0794	T908 0794		
0953	3/8*	26	80	24	33	10.00	8.00	11	4	8.4	T474 0953	T908 0953		
1111	7/16*	26	85	25	-	8.00	6.30	9	4	10.0	T474 1111	T908 1111		
1270	1/2*	26	89	29	-	9.00	7.10	10	4	11.6	T474 1270	T908 1270		
1429	9/16*	26	95	30	-	11.20	9.00	12	4	13.2	T474 1429	•		
1588	5/8*	26	102	32	-	12.50	10.00	13	4	14.8	T474 1588	•		
1905	3/4*	26	112	37	-	14.00	11.20	14	4	18.0	T474 1905	•		
2223	7/8*	26	118	38	-	16.00	12.50	16	4	20.8	T474 2223	•		
2540	1*	26	130	45	-	18.00	14.00	18	4	24.3	T474 2540	•		

BA													T471	T907
0600	0	1	66	19	26	6.30	5.00	8	3	5.1	T471 0600	•		
0530	1	0.9	62	17	23	5.60	4.50	7	3	4.5	T471 0530	T907 0530		
0470	2	0.81	58	16	22	5.00	4.00	7	3	4.0	T471 0470	T907 0470		
0410	3	0.73	53	13	18	4.50	3.55	6	3	3.4	T471 0410	T907 0410		
0360	4	0.66	50	17	-	3.55	2.80	5	3	3.0	T471 0360	T907 0360		
0320	5	0.59	48	15	-	3.15	2.50	5	3	2.65	T471 0320	T907 0320		
0280	6	0.53	48	15	-	3.15	2.50	5	3	2.3	T471 0280	T907 0280		
0250	7	0.48	45	10	-	2.80	2.24	5	3	2.05	T471 0250	T907 0250		
0220	8	0.43	45	10	-	2.80	2.24	5	3	1.8	T471 0220	T907 0220		
0190	9	0.39	41	8	-	2.50	2.00	4	3	1.55	T471 0190	T907 0190		
0170	10	0.35	41	8	-	2.50	2.00	4	3	1.4	T471 0170	T907 0170		

ISO	P											M			K				N							S							H																
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41
T468 / T906	●	●	●	●	●	○	○																																										
T474 / T908	●	●	●	●	●	○	○																																										
T471 / T907	●	●	●	●	●	○	○																																										

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective


• Available on request as special manufacture. Subject to lead time. * Limit & Nut Tolerance = Z4

BSF Finder

ISO Taps Pipe, G (BSPF), Straight Flute

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁




Catalogue Code	T479	T480
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer Limit	Taper Z3	Intermediate Z3

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	1/8	28	59	15	-	8.0	6.3	9	4	8.8	T479 0973	T480 0973
1316	1/4	19	67	19	-	10.0	8.0	11	4	11.8	T479 1316	T480 1316
1666	3/8	19	75	21	-	12.5	10.0	13	4	15.3	T479 1666	T480 1666
2096	1/2	14	87	26	-	16.0	12.5	16	4	19.0	T479 2096	T480 2096
2291	5/8	14	91	26	-	18.0	14.0	18	4	21.0	T479 2291	T480 2291
2644	3/4	14	96	28	-	20.0	16.0	20	4	24.5	T479 2644	T480 2644
3020	7/8	14	102	29	-	22.4	18.0	22	4	28.5	T479 3020	T480 3020
3325	1	11	109	33	-	25.0	20.0	24	4	31.0	T479 3325	T480 3325
4191	1-1/4	11	119	36	-	31.5	25.0	28	4	39.5	T479 4191	T480 4191
4780	1-1/2	11	125	37	-	35.5	28.0	31	4	45.5	T479 4780	T480 4780
5375	1-3/4	11	132	39	-	35.5	28.0	31	6	51.5	T479 5375	T480 5375
5961	2	11	140	41	-	40.0	31.5	34	6	57.5	T479 5961	T480 5961

ISO Taps Pipe, G (BSPF), Spiral Point Gun

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Depths up to approx. 1 x d₁



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
											T484
0973	1/8	28	80	24	33	10	8	11	3	8.8	T484 0973
1316	1/4	19	95	30	-	11.2	9	12	3	11.8	T484 1316
1666	3/8	19	112	37	-	14	11.2	14	4	15.3	T484 1666
2096	1/2	14	118	38	-	16	12.5	16	4	19.0	T484 2096
2644	3/4	14	135	45	-	20	16	20	4	24.5	T484 2644


ISO	P												M			K							N							S							H															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41			
T479	●	●	●	●	●	●	●										○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
T480	●	●	●	●	●	●	○										○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T484	●	●	○	○		●	○							○	○			○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel
 M Stainless Steel
 K Cast Iron
 N Non-Ferrous Metals
 S Titanium & Super Alloys
 H Hard Materials
 ● Optimal ○ Effective

ISO Taps Pipe, G (BSPF), Straight Flute

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁




Catalogue Code	T481	T909
Discount Group	D0702	D0702
Material	HSS	HSS
Surface Finish	Brt	Brt
Sutton Designation	N	N
Geometry	-	-
Chamfer	Bottoming	Set
Limit	Z3	Z3

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	1/8	28	59	15	-	8.0	6.3	9	4	8.8	T481 0973	T909 0973
1316	1/4	19	67	19	-	10.0	8.0	11	4	11.8	T481 1316	T909 1316
1666	3/8	19	75	21	-	12.5	10.0	13	4	15.3	T481 1666	T909 1666
2096	1/2	14	87	26	-	16.0	12.5	16	4	19.0	T481 2096	T909 2096
2291	5/8	14	91	26	-	18.0	14.0	18	4	21.0	T481 2291	T909 2291
2644	3/4	14	96	28	-	20.0	16.0	20	4	24.5	T481 2644	T909 2644
3020	7/8	14	102	29	-	22.4	18.0	22	4	28.5	T481 3020	•
3325	1	11	109	33	-	25.0	20.0	24	4	31.0	T481 3325	T909 3325
4191	1-1/4	11	119	36	-	31.5	25.0	28	4	39.5	T481 4191	•
4780	1-1/2	11	125	37	-	35.5	28.0	31	4	45.5	T481 4780	•
5375	1-3/4	11	132	39	-	35.5	28.0	31	6	51.5	T481 5375	•
5961	2	11	140	41	-	40.0	31.5	34	6	57.5	T481 5961	•

G (BSPF)
Finder

ISO Taps Pipe, G (BSPF), Spiral Flute

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Depths up to approx. 1 x d₁



Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #
T485											
0973	1/8	28	80	24	33	10	8	11	3	8.8	T485 0973
1316	1/4	19	95	30	-	11.2	9	12	3	11.8	T485 1316
1666	3/8	19	112	37	-	14	11.2	14	4	15.3	T485 1666
2096	1/2	14	118	38	-	16	12.5	16	4	19.0	T485 2096
2644	3/4	14	135	45	-	20	16	20	4	24.5	T485 2644

ISO	P										M					K					N					S					H																					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41					
T481	●	●	●	●	●	●	○																																													
T485	●	●	●	○		●								○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
T909	●	●	●	●	●	○																																														

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials


● Optimal ○ Effective

• Available on request as special manufacture. Subject to lead time.

ISO Taps Pipe, G (BSPF), Straight Flute

suttontools

- General purpose use
- Suitable for materials up to 1000N/mm²
- Through & blind holes
- Suitable for both hand and machine operations
- Depths up to approx. 1 x d₁




Catalogue Code	T482	T483
Discount Group	D0706	D0706
Material	HSS	HSS
Surface Finish	TiN	TiN
Sutton Designation	N	N
Geometry	-	-
Chamfer	Intermediate	Bottoming
Limit	Z3	Z3

Size Ref.	d ₁	TPI	l ₁	l ₂	l ₃	d ₂	sq	l ₄	z	drill Ø	Item #	Item #
0973	1/8	28	59	15	-	8.0	6.3	9	4	8.8	T482 0973	T483 0973
1316	1/4	19	67	19	-	10.0	8.0	11	4	11.8	T482 1316	T483 1316
1666	3/8	19	75	21	-	12.5	10.0	13	4	15.3	T482 1666	T483 1666
2096	1/2	14	87	26	-	16.0	12.5	16	4	19.0	T482 2096	T483 2096
2291	5/8	14	91	26	-	18.0	14.0	18	4	21.0	•	T483 2291
2644	3/4	14	96	28	-	20.0	16.0	20	4	24.5	•	T483 2644
3020	7/8	14	102	29	-	22.4	18.0	22	4	28.5	•	•
3325	1	11	109	33	-	25.0	20.0	24	4	31.0	•	•
4191	1-1/4	11	119	36	-	31.5	25.0	28	4	39.5	•	•
4780	1-1/2	11	125	37	-	35.5	28.0	31	4	45.5	•	•
5375	1-3/4	11	132	39	-	35.5	28.0	31	6	51.5	•	•
5961	2	11	140	41	-	40.0	31.5	34	6	57.5	•	•

G (BSPF) Finder

ISO	P										M			K				N						S							H																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41		
T482	●	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
T483	●	●	●	●	●	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel
 M Stainless Steel
 K Cast Iron
 N Non-Ferrous Metals
 S Titanium & Super Alloys
 H Hard Materials
 ● Optimal ○ Effective

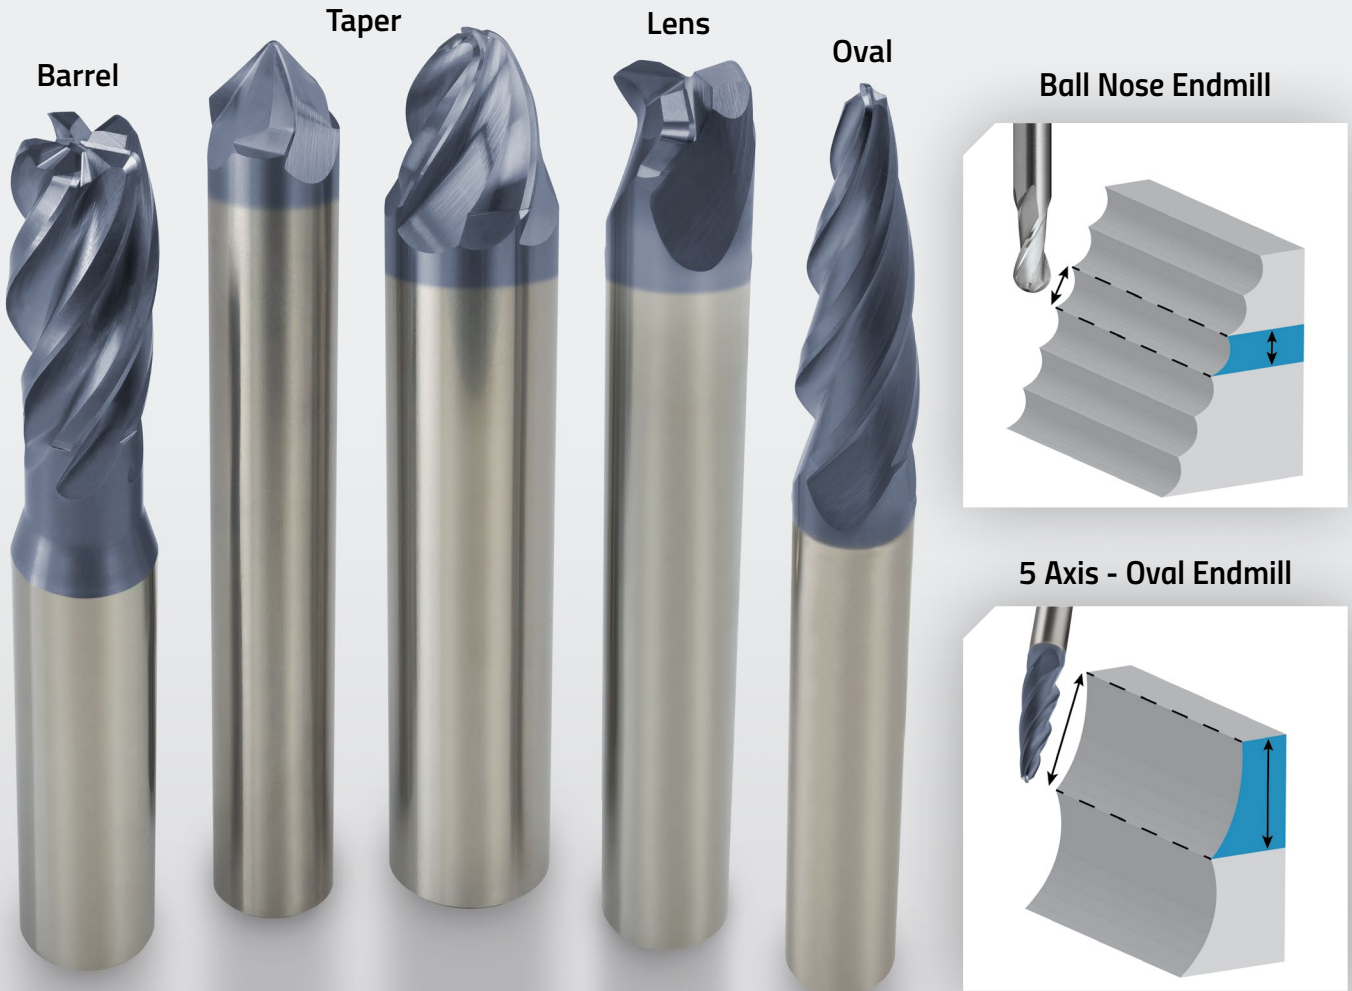

Optimise your 5-Axis Machining

- Up to 90% cycle time savings over Ball Nose Endmills
- Ideal for finishing of 3D surfaces and Hybrid CNC-3D printing application
- Less than 10 μ m profile deviation for high workpiece accuracy
- Customised solutions available



