

STAINLESS STEEL PLIABLE CONDUIT

DESCRIPTION:

Made with close pitch annular corrugations from butt-welded stainless-steel tube (same welding process as rigid gal conduit).

FEATURES:

The conduit combines ease of installation with high impact (1250) and compression resistance. It is intended for use in situations where mechanical damage, corrosion, high temperature, flammability, or halogens could be a problem. The conduit is also COCKATOO PROOF.

FITTINGS:


The conduit can be used with CABFLX brass or stainless-steel fittings. The fittings incorporate 'O' ring seals and have a swivelling action for ease of installation. Working Temperature: -60° C to +200° C using silicone 'O' rings.

SEALING:

IP 68.

COMPLIANCE:

The conduit has been tested to the following International Standard - IEC 61386 - 1, "Conduit systems for cable management" - general conditions. IEC 61386 - 22, "Pliable conduit systems" - clauses 10.2, 10.3, 10.4 and 10.6.

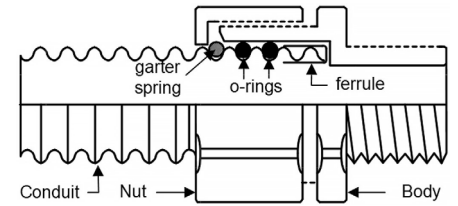

PART No.	TRADE SIZE*	I.D.	ROLL LENGTH (M)	BRASS FITTING	STAINLESS FITTING (POA)
SSP12	12mm	6.45mm	20	CBM12	CSM12
SSP16	16mm	12mm	20	CBM16	CSM16
SSP20	20mm	16mm	20	CBM20	CSM20
SSP25	25mm	21mm	20	CBM25	CSM25
SSP32	32mm	27mm	20	CBM32	CSM32
SSP40	40mm	35mm	10	CBM40	CSM40
SSP50	50mm	40mm	10	CBM50	CSM50
SSP63	63mm	51mm	10	CBM63	CSM63

*Larger sizes up to 100mm made to order

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.