



## INSTRUCTION MANUAL CABSTRAPTOOL2


CABSTRAPTOOL2 will tension, cut and crimp CABSTRAP Stainless Steel Strap with CABSTRAP buckles. Please follow instruction for best results.




1. Slide the strap through the seal. Note position of seal, with lugs held up and away from the operator.




2. Pull the strap THROUGH THE SEAL over top of box, down side, and back underneath.




3. Thread the strap through the seal the second time, completing the loop. About a four-inch length of strap should protrude through the seal.

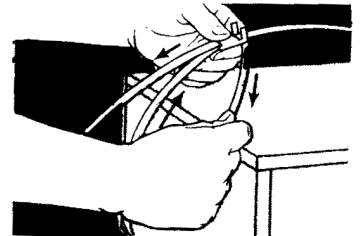


4. Bend back the under layer of strapping as shown to form a flap between the seal and the box.




5. Pull strap tightly around box and through seal. Note 1-inch distance between seal and box edge, also correct position of underflap.




6. Hold tool in left hand as shown. Line up slots in the nose and ratchet so they are on a straight line, as indicated by the dashed line.




7. Insert the strap through nose and ratchet slots.

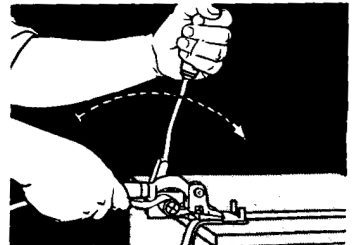


8. Hold short handle in right hand in position shown. Push long handle forward in full arc with left hand. This tightens the strap.




9. If strap needs further tightening, pull long handle back from position "A" to position "B". Tighten strap with short easy strokes from "B" to "C".




10. Bring long handle back to original starting position as in Figure 7.




11. Take both handles in left hand and move both forward as shown.

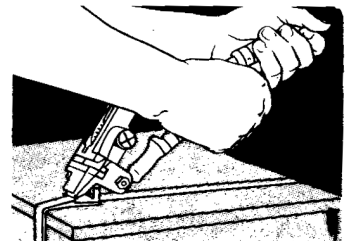


12. Hold long handle in left hand. Grasp short handle in right hand.




13. Push small handle downward with right hand. This cuts the strap.



14. Hold both handles in right hand. Place thumb of left hand against base of the Tool ready to press down against severed strap.



15. Move Tool forward and away from the seal. Press the severed strap end downward between the lugs with your thumb.

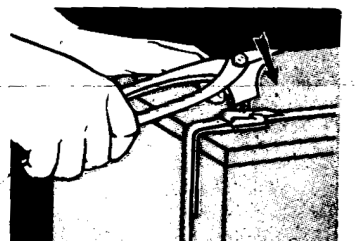

16. Hammer down the lugs with the knob on the left side of the tool to complete the tie.

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.