

PRODUCT DATASHEET

KUS10 FLAT CABLE WIRE STRIPPER

The CABAC Wire Stripper KUS10 has a precise adjustment (5-fold) and an optical length scale of 8-24mm (5/16 - 1 inch). This allows flexible round cables of 0.5 to 10mm2 (24 - 10 AWG) and solid round cables of 0.5 - 10mm² (18 - 15 AWG) to be stripped. From 10mm2, cables must be stripped in two stages. The Wire Stripper KUS10 is particularly well-suited to two or three-core, PVC-insulated flat cables of 0.75 - 4.0mm².


An easy-to-access side cutter is integrated into the tool and cab be used up to a cable diameter of 3mm. It has exchangeable blades.

TECHNICAL DATA

FEATURE	DESCRIPTION
Cable type	Fine-wired and solid conductors with PVC insulation
Field of use	Flat cables 0.75 - 4.0mm ² , Round cables flex. 0.5 - 16mm ²
Inner blade	Replaceable
Additional Benefits	Side cutter up to max. 3mm Ø
Approval/certificate	Safety tested by TŪV NORD
Material	Glass fibre reinforced polyamide
Length	170mm
Weight	217g
Accessories	Replacement blade set, item no: KUS10-BLADE

ORDERING INFORMATION PART NO: KUS10

*Note: Do not use on "live" conductors

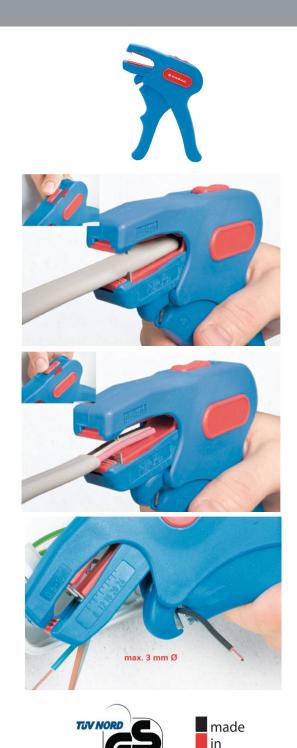

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

T: 133 122 | F: 1300 303 310 | E: sales@cabac.com.au | W: cabac.com.au



German